


Assembly Group BG11 MS 41 M10 HCP

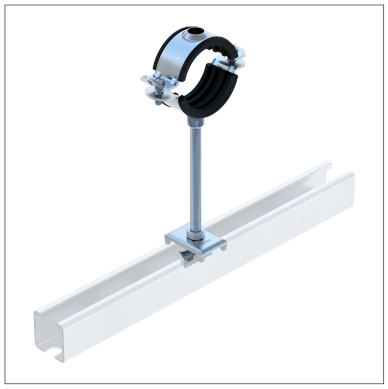

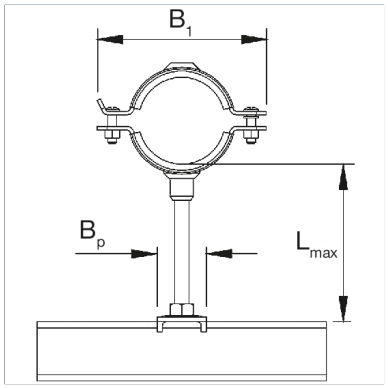

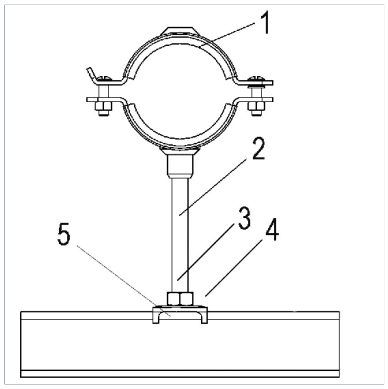

General Information

An Assembly Group containing components to make up a permanent pipe connection with the pipe clamp Stabil D-3G. The Assembly Group is designed for use with the Sikla MS 41 channel system. The height is adjusted using the Threaded Rod M10. The pipe clamp with sound absorption lining ensures sound absorption in accordance with DIN 4109.

Installation

The assembly of the individual components to form an Assembly Group is carried out during the course of pipe installation on the construction site.

L(max, horizontal) = not recommended

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Isolating element material	SBR/EPDM
Connecting element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
BG11 MS 41 M10 DN 15 HCP	19.00 mm	23.00 mm	DN 15 (1/2")	0.270 kg/ pcs.	1 pcs.	110144
BG11 MS 41 M10 DN 20 HCP	24.00 mm	28.00 mm	DN 20 (3/4")	0.300 kg/ pcs.	1 pcs.	110145
BG11 MS 41 M10 DN 25 HCP	33.00 mm	37.00 mm	DN 25 (1")	0.320 kg/ pcs.	1 pcs.	110146
BG11 MS 41 M10 DN 32 HCP	40.00 mm	45.00 mm	DN 32 (1 1/4")	0.340 kg/ pcs.	1 pcs.	110147
BG11 MS 41 M10 DN 40 HCP	47.00 mm	52.00 mm	DN 40 (1 1/2")	0.360 kg/ pcs.	1 pcs.	110148
BG11 MS 41 M10 DN 50 HCP	60.00 mm	65.00 mm	DN 50 (2")	0.380 kg/ pcs.	1 pcs.	110149
BG11 MS 41 M10 DN 65 HCP	73.00 mm	78.00 mm	DN 65 (2 1/2")	0.480 kg/ pcs.	1 pcs.	110150
BG11 MS 41 M10 DN 80 HCP	88.00 mm	93.00 mm	DN 80 (3")	0.530 kg/ pcs.	1 pcs.	110151
BG11 MS 41 M10 DN 100 HCP	108.00 mm	115.00 mm	DN 100 (4")	0.590 kg/ pcs.	1 pcs.	110152

Assembly Group BG11 MS 41 M10 HCP

Dimensions

Type	B1	BP	Lmax
BG11 MS 41 M10 DN 15 HCP	68 mm	35 mm	150 mm
BG11 MS 41 M10 DN 20 HCP	75 mm	35 mm	150 mm
BG11 MS 41 M10 DN 25 HCP	81 mm	35 mm	150 mm
BG11 MS 41 M10 DN 32 HCP	93 mm	35 mm	150 mm
BG11 MS 41 M10 DN 40 HCP	104 mm	35 mm	150 mm
BG11 MS 41 M10 DN 50 HCP	117 mm	35 mm	150 mm
BG11 MS 41 M10 DN 65 HCP	150 mm	35 mm	150 mm
BG11 MS 41 M10 DN 80 HCP	164 mm	35 mm	150 mm
BG11 MS 41 M10 DN 100 HCP	187 mm	35 mm	150 mm

Certification