

Blockset PBS CC41

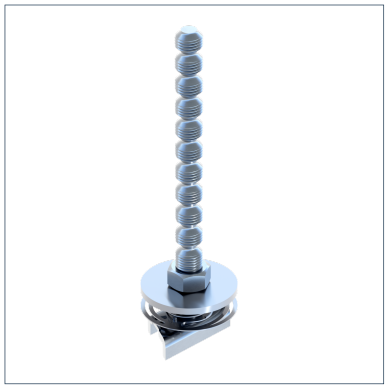

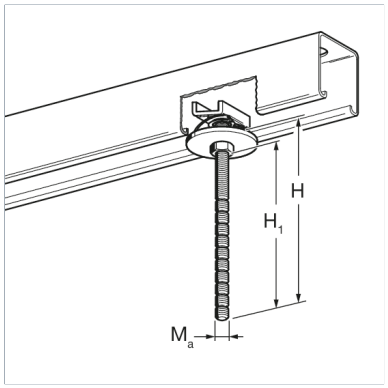

General Information

Quick-installation element for efficient mounting of pipe clamps and other components to Channels MS 27. Time-saving due to a pre-assembled Blockset consisting of 4 individual parts. Easy height adjustment within the channel. Retains position in horizontal and vertical channels during locational adjustment. But still can be moved easily and freely along the channel as required. Grooved rod, prevents unintended unscrewing. Easy cutting of the grooved rod - cutting grooves every 10 mm using Rod Cutter PBC 1.

Installation

Insert the Blockset into the channel, then tighten the nut - That's it!
Disassembly by turning the Grooved Rod counterclockwise while pressing in the direction of the channel.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
PBS CC41 M10 X 35	4.50 kN
PBS CC41 M10 X 75	4.50 kN
PBS CC41 M10 X 125	4.50 kN
PBS CC41 M10 X 175	4.50 kN
PBS CC41 M10 X 275	4.50 kN

Note on loadings

The point carrying capacity of the channel must not be exceeded.

Types

Type	L	Weight	Quantity	Part number
PBS CC41 M10 X 35	35 mm	0.094 kg/pcs.	25 pcs.	191594
PBS CC41 M10 X 75	75 mm	0.11 kg/pcs.	25 pcs.	191603
PBS CC41 M10 X 125	125 mm	0.136 kg/pcs.	25 pcs.	191612
PBS CC41 M10 X 175	175 mm	0.158 kg/pcs.	25 pcs.	191621
PBS CC41 M10 X 275	275 mm	0.212 kg/pcs.	25 pcs.	191639

Dimensions

Type	H	H1	Ma
PBS CC41 M10 X 35	33 mm	22 mm	M10
PBS CC41 M10 X 75	73 mm	62 mm	M10
PBS CC41 M10 X 125	123 mm	112 mm	M10
PBS CC41 M10 X 175	173 mm	162 mm	M10
PBS CC41 M10 X 275	273 mm	262 mm	M10

Certification