
# Flat Fitting ECO CC 1

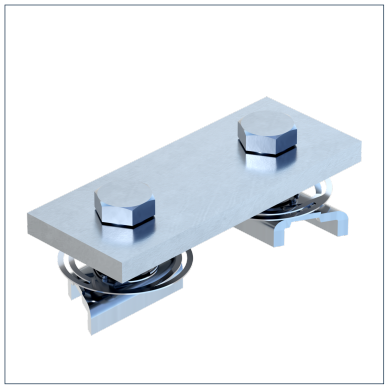

## General Information

Pre-assembled connecting element, specifically for frame constructions made of channel. Optimised connection technology, e.g. for creating a T-connection with the Sikla MS 41 system. Locks automatically when being put in place, and supports its own weight. Secure, form-locking, non-positive connection. Completely pre-assembled with serrated CC nut and clamping screw M10. High stiffness.

## Installation

Torque: 40 Nm

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | steel |
| Surface finish | electro galvanized (Fe//Zn) |
| Corrosion protection class | C2 |

## Forces

| Type | -V{Z,perm.} |
|---|---|
| ECO CC - 1 | 2.00 kN |

## Types

| Type | Weight | Quantity | Part number |
|---|---|---|---|
| ECO CC - 1 | 0.317 kg/pcs. | 20 pcs. | 181190 |

## Dimensions

| Type | BP | HP | HP1 | tP |
|---|---|---|---|---|
| ECO CC - 1 | 40 mm | 101 mm | 60 mm | 7 mm |

## Certification