
Flat Fitting ECO CC 2

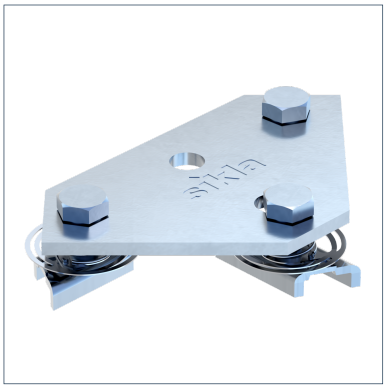

General Information

Pre-assembled connecting element, specifically for frame constructions made of channel. Optimised connection technology, e.g. for creating a T-connection or V-stuts with the Sikla MS 41 system. Locks automatically when being put in place, and supports its own weight. Secure, form-locking, non-positive connection. Completely pre-assembled with serrated CC nut and clamping screw M10. High stiffness.

Installation

Torque: 40 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
ECO CC - 2	2.00 kN

Types

Type	Weight	Quantity	Part number
ECO CC - 2	0.473 kg/pcs.	10 pcs.	181199

Dimensions

Type	BP	BP2	BP3	dP	HP	HP1	tP
ECO CC - 2	83 mm	20 mm	65 mm	12.5 mm	147 mm	100 mm	5 mm

Certification

Stahl

epd-global
Powered by EPD-Norway