

Assembly Group BG54 F100 HCP



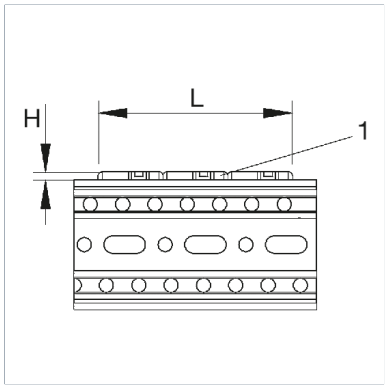

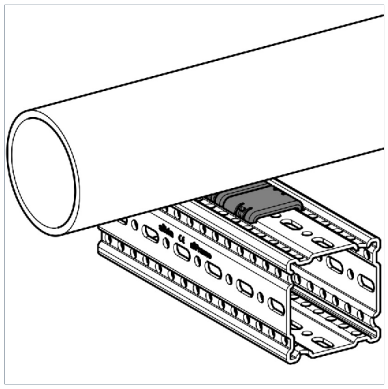

General Information

An Assembly Group for the supporting of pipes without complex requirements and without heat insulation on siFramo beam sections. This allows free sliding of the pipe in all directions on the Beam Section TP F 100.

Installation

According to the anticipated sideways movement of the supported pipes, 1 to 3 U-UB pads should be clicked into the beam section.

Number U-UB pad	Lenght L [mm]	Height H [mm]
1	40	5
2	80	5
3	120	5

Temperature

Max. temperature	130 °C
Min. temperature	-20 °C

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	PA
Sliding element material	PA 6.0
Surface finish	HCP
Corrosion protection class	C4

Types

Type	DN	Weight	Quantity	Part number
BG54 F100 DN15 - DN300 HCP	DN 300 (12")	0.030 kg/pcs.	1 pcs.	113913

Dimensions

Type	H	L
BG54 F100 DN15 - DN300 HCP	5 mm	40 mm

Certification