# Welding Plate SPL UNI HCP

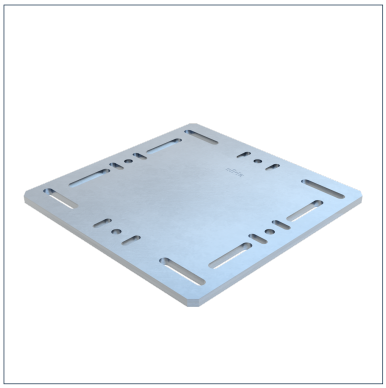

## General Information

Interface element to enable a welded connection of load chains, spring hangers etc. to Beam Section TP F. Our type 'SPL universal' enables a welded connection to primary steel with flange width up to 300 mm. At the same time it's possible to install type 'SPL universal' to Beam Section TP F if a larger installation surface is needed. The welding plate can be welded directly without previous treatment due to a corrosion-resistant weld-thru coating which is compatible with both the HDG surface of the siFramo section and the health and safety requirements of the welding process.

## Installation

Depending on the type, different installation methods are recommended:
a) Installation of SPL universal with Flange Screws SCR FLA TT M10 x 30 (part no. 116479) to Beam Section TP F.
b) Installation of SPL universal by means of 1 Assembly Set 5P M12 S to primary steel with flange width between 100 and 300 mm.

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | steel |
| Surface finish | HCP |
| Corrosion protection class | C4 |

## Types

| Type | Weight | Quantity | Part number |
|---|---|---|---|
| SPL UNI HCP | 11.940 kg/pcs. | 1 pcs. | 113636 |

## Dimensions

| Type | BP | BP1 | BP2 | BP3 | bP1 | dP | HP | HP1 | HP2 | HP3 | lzP1 | tP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SPL UNI HCP | 370 mm | 300 mm | 260 mm | 62 mm | 14 mm | 14 mm | 370 mm | 300 mm | 160 mm | 50 mm | 65 mm | 12 mm |

## Certification

Stahl