
Slide Set GS F100 1G HCP

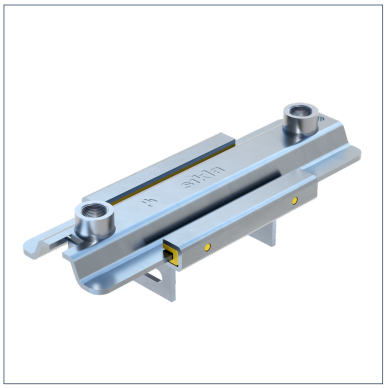

General Information


Heavy-duty Slide Set for single and twin-clamp connection to siFramo TP F 100 beam sections. 1/2' thread connection allows direct connection to pipe clamp Stabil I -1/2' by means of threaded tube without further adaption parts.

Installation

Fastening to TP F support profile using two Self-Forming Srews FLS F.

Temperature

Permissible long-term temperature	130 °C

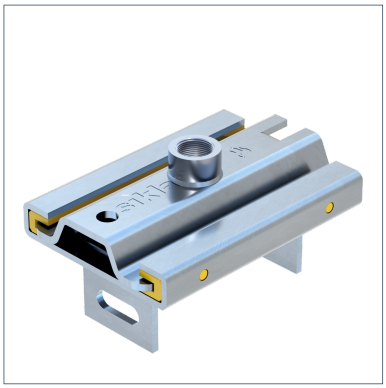


Mechanical Properties

Static friction µ0	0,2

Material Properties

Halogen-free	0
UV-resistant	0

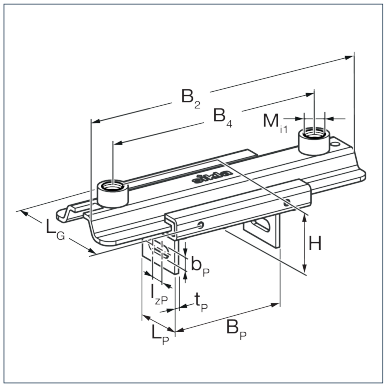


Material

Primary element material	steel
Sliding element material	PA GF
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{Z,perm.}	V{Z,perm.}
GS F100 1G HCP	5.70 kN	17.00 kN
GS F100 1G2 HCP	8.70 kN	12.00 kN

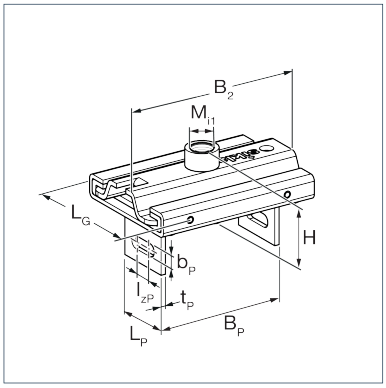

Types

Type	Max. lever arm	Max. slide path	Thread connection	Weight	Quantity	Part number
GS F100 1G HCP	200.00 mm	100.00 mm	1/2"	1.400 kg/ pcs.	10 pcs.	113091
GS F100 1G2 HCP	300.00 mm	135.00 mm	1/2"	1.830 kg/ pcs.	10 pcs.	113092

Slide Set GS F100 1G HCP

Dimensions

Type	B2	B4	BP	bP	H	LP	Mi1	tP
GS F100 1G HCP	150 mm		109.5 mm	11 mm	46.5 mm	50 mm	1/2"	4 mm
GS F100 1G2 HCP	275 mm	210 mm	109.5 mm	11 mm	46.5 mm	50 mm	1/2"	4 mm

Certification

