


Assembly Group BG14 F 80 M10 HCP

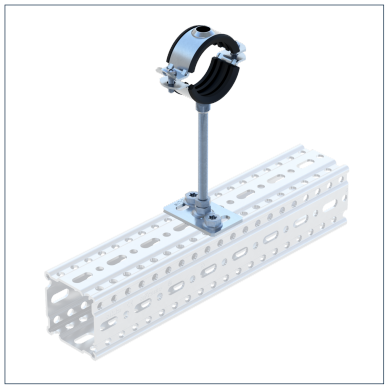

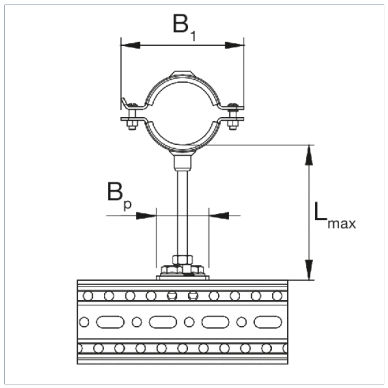

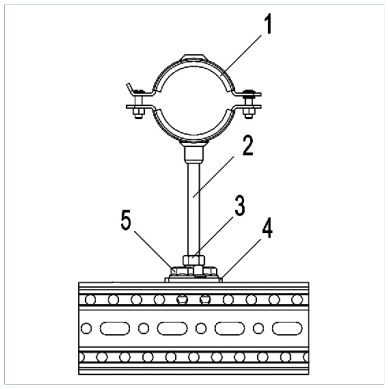

General Information

An Assembly Group containing components to make up a permanent pipe connection with the pipe clamp Stabil D-3G. The Assembly Group is designed for use with the Beam Section TP F 80. It is connected using the Self Forming Screw FLS F, and the height is adjusted via the Threaded Rod M10. The pipe clamp with sound absorption lining ensures sound absorption in accordance with DIN 4109.

Installation

The assembly of the individual components to form an Assembly Group is carried out during the course of pipe installation on the construction site.

L(max, horizontal) = not recommended

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Isolating element material	SBR/EPDM
Connecting element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
BG14 F 80 M10 DN 10 HCP	14.00 mm	18.00 mm		0.300 kg/pcs.	1 pcs.	210200
BG14 F 80 M10 DN 15 HCP	19.00 mm	23.00 mm	DN 15 (1/2")	0.350 kg/pcs.	1 pcs.	110200
BG14 F 80 M10 DN 20 HCP	24.00 mm	28.00 mm	DN 20 (3/4")	0.380 kg/pcs.	1 pcs.	110201
BG14 F 80 M10 DN 25 HCP	33.00 mm	37.00 mm	DN 25 (1")	0.400 kg/pcs.	1 pcs.	110202
BG14 F 80 M10 DN 32 HCP	40.00 mm	45.00 mm	DN 32 (1 1/4")	0.420 kg/pcs.	1 pcs.	110203
BG14 F 80 M10 DN 40 HCP	47.00 mm	52.00 mm	DN 40 (1 1/2")	0.440 kg/pcs.	1 pcs.	110204
BG14 F 80 M10 DN 45 HCP	53.00 mm	58.00 mm		0.400 kg/pcs.	1 pcs.	210204
BG14 F 80 M10 DN 50 HCP	60.00 mm	65.00 mm	DN 50 (2")	0.460 kg/pcs.	1 pcs.	110205
BG14 F 80 M10 DN 65 HCP	73.00 mm	78.00 mm	DN 65 (2 1/2")	0.560 kg/pcs.	1 pcs.	110206
BG14 F 80 M10 DN 80 HCP	88.00 mm	93.00 mm	DN 80 (3")	0.610 kg/pcs.	1 pcs.	110207
BG14 F 80 M10 DN 100 HCP	108.00 mm	115.00 mm	DN 100 (4")	0.670 kg/pcs.	1 pcs.	110208

Assembly Group BG14 F 80 M10 HCP

Dimensions

Type	B1	BP	Lmax
BG14 F 80 M10 DN 10 HCP	63 mm	50 mm	150 mm
BG14 F 80 M10 DN 15 HCP	68 mm	50 mm	150 mm
BG14 F 80 M10 DN 20 HCP	75 mm	50 mm	150 mm
BG14 F 80 M10 DN 25 HCP	81 mm	50 mm	150 mm
BG14 F 80 M10 DN 32 HCP	93 mm	50 mm	150 mm
BG14 F 80 M10 DN 40 HCP	104 mm	50 mm	150 mm
BG14 F 80 M10 DN 45 HCP	110 mm	50 mm	150 mm
BG14 F 80 M10 DN 50 HCP	117 mm	50 mm	150 mm
BG14 F 80 M10 DN 65 HCP	150 mm	50 mm	150 mm
BG14 F 80 M10 DN 80 HCP	164 mm	50 mm	150 mm
BG14 F 80 M10 DN 100 HCP	187 mm	50 mm	150 mm

Certification