


Lifting Lug KLA F 80

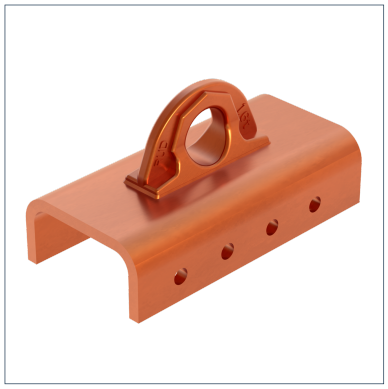

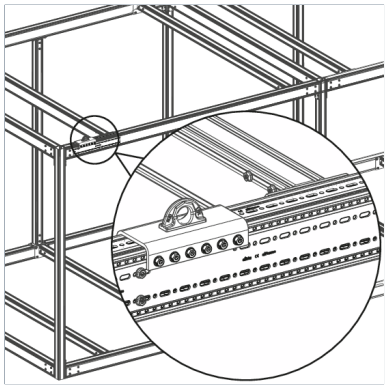

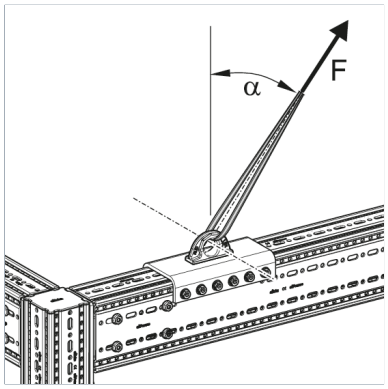

General Information

Element for lifting siFramo skids with TP F 80 beam sections using a lifting tool (e.g. crane). Indestructible construction for repeated lifting operations in multiple projects.

Installation

The Lifting Lug KLA F is connected to Beam Sections TP F:
TP F 80: 8 x SCR FLA TT M10 x 30 HCP (item code 116479)
(Lifting Lug supplied with the correspondent screws.)
Tightening torque SCR FLA TT: 20 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Corrosion protection class	C2

Forces

Type	Vmax α = 0°	Vmax α = 0° - 45°	Vmax α = 45° - 60°
KLA F 80	16.00 kN	11.00 kN	8.00 kN

Types

Type	Weight	Quantity	Part number
KLA F 80	2.650 kg/pcs.	1 pcs.	292874

Dimensions

Type	C	D	H	HG	L	t
KLA F 80	40 mm	35 mm	42 mm	107.3 mm	200 mm	8 mm

Certification

Stahl