


# Profile Lining SAL 46

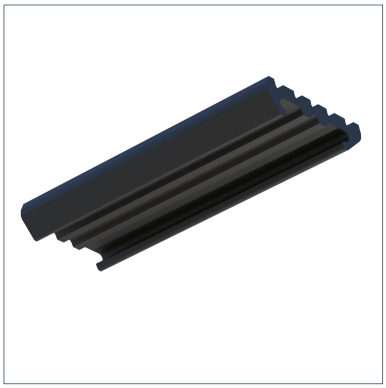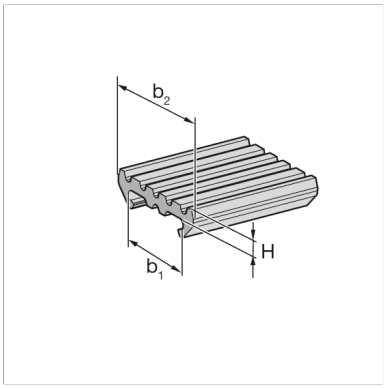

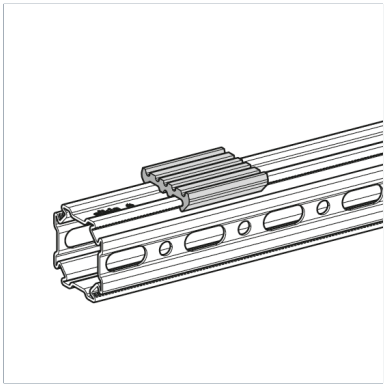

## General Information

Sound absorption lining for inserting into Profiles PRO 46. Mainly for use in ducting systems, also for sound proof installations as per DIN 4109.

## Temperature

| | |
|---|---|
| Max. temperature | 110 °C |
| Min. temperature | -40 °C |

## Material Properties

| | |
|---|---|
| Hardness | 45°+/-5° Shore |
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | SBR/EPDM |

## Fire Performance

Class B2 according to DIN 4102

## Types

| Type | Roll | Weight | Quantity | Part number |
|---|---|---|---|---|
| SAL 46 | 30 m | 0.3 kg/m | 30 m | 802160 |
| SAL 46 L 50 | | 0.015 kg/pcs. | 100 pcs. | 802161 |

## Dimensions

| Type | b1 | b2 | H |
|---|---|---|---|
| SAL 46 | 32.8 mm | 45 mm | 5.5 mm |
| SAL 46 L 50 | 32.8 mm | 45 mm | 5.5 mm |

## Certification

epd-global
Powered by EPD-Norway