


Profile Holder MPH F100- 46 HCP

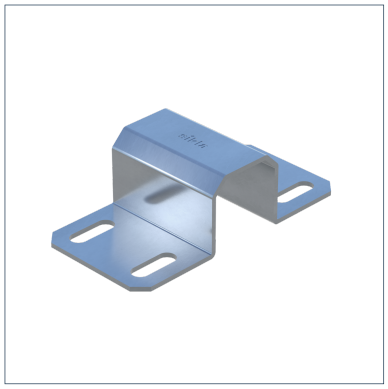

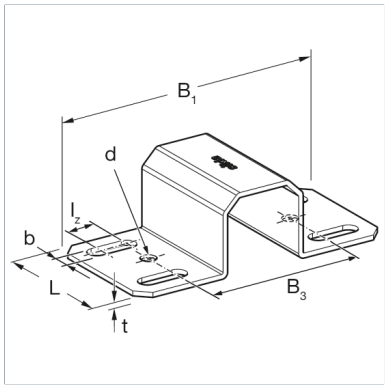

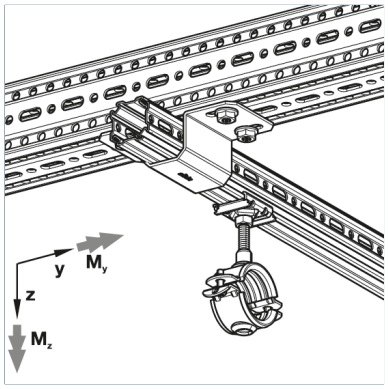

General Information

Implementation of a cross-connection between the siFramo TP F 100 and the siMetrix PRO 46 profile.

Installation

Connection of a Profile PRO 46 to a beam section TP F 100 with self forming screws FLS F.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{X,perm.}	V{X,perm.}	-V{Y,perm.}	V{Y,perm.}	-V{Z,perm.}	V{Z,perm.}
MPH F100 - 46 HCP	0.26 kN	0.26 kN	20.57 kN	20.57 kN	21.63 kN	21.63 kN

Moments

Type	-M{Y,perm.}	M{Y,perm.}	-M{Z,perm.}	M{Z,perm.}
MPH F100 - 46 HCP	0.73 kNm	0.73 kNm	0.68 kNm	0.68 kNm

Types

Type	Weight	Quantity	Part number
MPH F100 - 46 HCP	0.540 kg/pcs.	10 pcs.	802547

Dimensions

Type	b	B1	B3	d	lz	L	t
MPH F100 - 46 HCP	11 mm	162 mm	94 mm	11 mm	20 mm	100 mm	3 mm

Certification

Documents

DoP (EN) - MPH 46