


Profile Holder MPH MS 41- 46 HCP

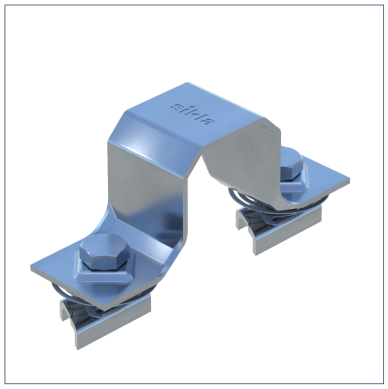

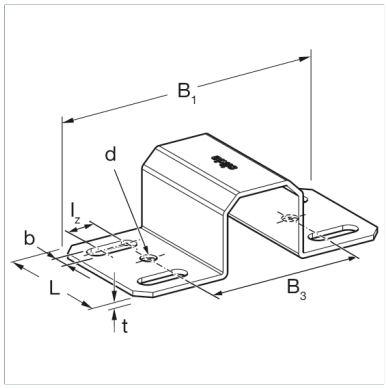

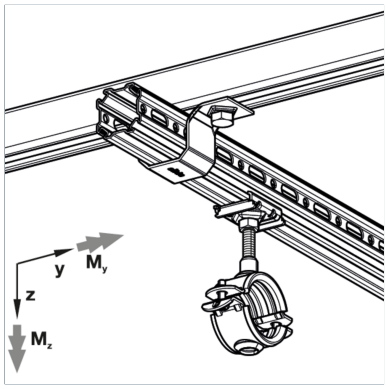

General Information

Implementation of a cross-connection between the Sikla Channel with a rail width of 41 mm and the siMetrix PRO 46 profile.

Installation

The combination of the Profile PRO 46 and Channel MS 41 is made using speed nuts.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{X,perm.}	V{X,perm.}	-V{Y,perm.}	V{Y,perm.}	-V{Z,perm.}	V{Z,perm.}
MPH MS 41 - 46 HCP	0.14 kN	0.14 kN	1.97 kN	1.97 kN	12.00 kN	12.00 kN

Moments

Type	-M{Y,perm.}	M{Y,perm.}	-M{Z,perm.}	M{Z,perm.}
MPH MS 41 - 46 HCP	0.06 kNm	0.06 kNm	0.08 kNm	0.08 kNm

Types

Type	Weight	Quantity	Part number
MPH MS 41 - 46 HCP	0.150 kg/pcs.	10 pcs.	803867

Dimensions

Type	B1	B3	d	L	t
MPH MS 41 - 46 HCP	132 mm	94 mm	12 mm	40 mm	2.5 mm

Certification

Stahl

epd-global
Powered by EPD-Norway

Documents

DoP (EN) - MPH 46