



Adapter AD IG/IG

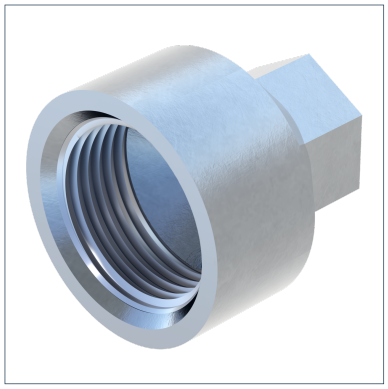

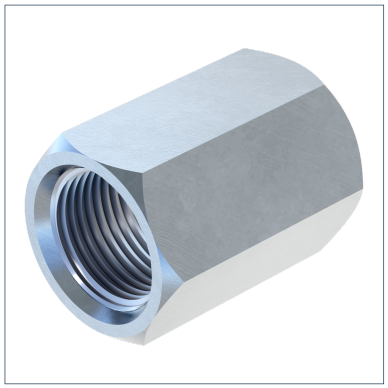

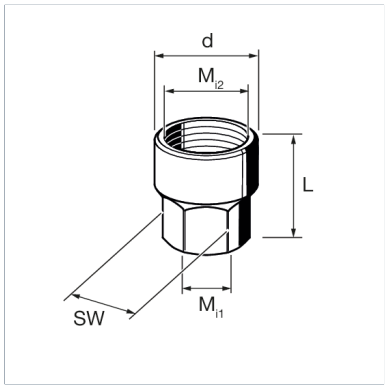

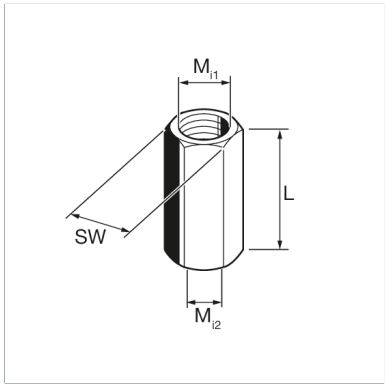

General Information

Adapter for additional connection options for all Sikla Pipe Clamps equipped with 3G triple thread nut, fixed points and threaded tubes. Adapter has internal threads on both sides.

Installation

During assembly the Adapter has to be locked with two hexagon nuts (not included in scope of delivery).

A/F of types:

Type	A/F [mm]
M16/M10	19
M16/M12	19
M16/M16	19
1/2"/M10	24
1/2"/M12	24
1/2"/M16	24
1/2"/1/2"	24
3/4"/M10	32
3/4"/M12	32
3/4"/M16	32
1"/M10	22
1"/M12	22
1"/M16	22
1"/1/2"	27

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	Form A: steel Form B: cast iron
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Adapter AD IG/IG

Forces

Type	-V{Z,perm.}
AD IG/IG M16/M10	8.50 kN
AD IG/IG M16/M12	12.50 kN
AD IG/IG M16/M16	23.50 kN
AD IG/IG 3/8'' M16	23.50 kN
AD IG/IG 1/2''/M10	8.50 kN
AD IG/IG 1/2''/M16	23.50 kN
AD IG/IG 1/2''/1/2''	23.50 kN
AD IG/IG 3/4''/M16	23.50 kN
AD IG/IG 1''/1/2''	23.50 kN

Types

Type	L	Configuration	Weight	Quantity	Part number
AD IG/IG M16/M10	35 mm	Form A	0.046 kg/pcs.	50 pcs.	106740
AD IG/IG M16/M12	35 mm	Form A	0.043 kg/pcs.	50 pcs.	124665
AD IG/IG M16/M16	30 mm	Form A	0.031 kg/pcs.	50 pcs.	106290
AD IG/IG 3/8'' M16	40 mm	Form A	0.037 kg/pcs.	25 pcs.	146335
AD IG/IG 1/2''/M10	35 mm	Form A	0.078 kg/pcs.	10 pcs.	146371
AD IG/IG 1/2''/M16	40 mm	Form A	0.072 kg/pcs.	25 pcs.	124656
AD IG/IG 1/2''/1/2''	35 mm	Form A	0.054 kg/pcs.	10 pcs.	146380
AD IG/IG 3/4''/M16	35 mm	Form A	0.151 kg/pcs.	10 pcs.	105660
AD IG/IG 1''/1/2''	40 mm	Form B	0.13 kg/pcs.	10 pcs.	146405

Dimensions

Type	L	Mi1	Mi2	SW
AD IG/IG M16/M10	35 mm	M10	M16	19 mm
AD IG/IG M16/M12	35 mm	M12	M16	19 mm
AD IG/IG M16/M16	30 mm	M16	M16	19 mm
AD IG/IG 3/8'' M16	40 mm	M16	3/8"	32 mm
AD IG/IG 1/2''/M10	35 mm	M10	1/2"	24 mm
AD IG/IG 1/2''/M16	40 mm	M16	1/2"	24 mm
AD IG/IG 1/2''/1/2''	35 mm	1/2"	1/2"	24 mm
AD IG/IG 3/4''/M16	35 mm	M16	3/4"	32 mm
AD IG/IG 1''/1/2''	40 mm	1/2"	1"	27 mm

Certification