

Sound Absorption Unit SDE 27

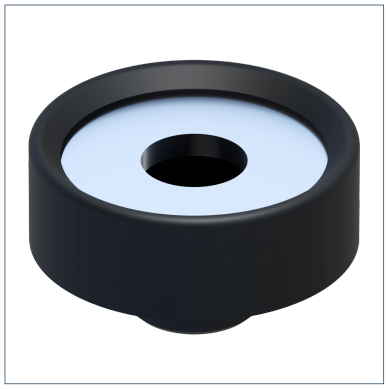

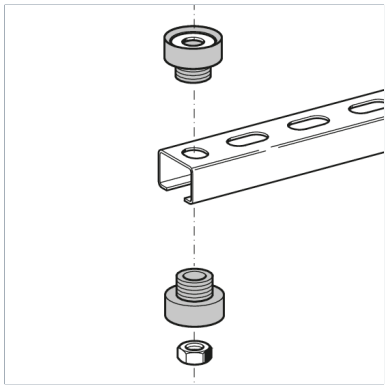

General Information

Sound Absorption Unit to be used in combination with Sikla Channels MS 27 in ducting systems (respecting sound proof demands according to DIN 4109). The geometry of this element reliably secures sound absorption between channel and suspension.

Installation

Clamp the Sound Absorption Unit into the round hole of the channel back and into the channel opening. Thread to be pulled through and contered afterwards.

Temperature

Max. temperature	110 °C
Min. temperature	-50 °C

Material Properties

Hardness	50°+/-5° Shore
Halogen-free	0
UV-resistant	0

Material

Isolating element material	TPE
Connecting element material	steel
Corrosion protection class	C2

Forces

Type	-V{X,perm.}	V{X,perm.}
SDE TYP 27	0,30 kN	0,30 kN

Fire Performance

Class B2 according to DIN 4102

Types

Type	Weight	Quantity	Part number
SDE TYP 27	0,01 kg/pcs.	100 pcs.	197973

Certification

epd-global
Powered by EPD-Norway