



Adapter NT CC41 DIN 3015

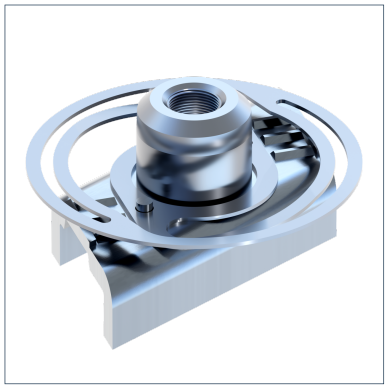

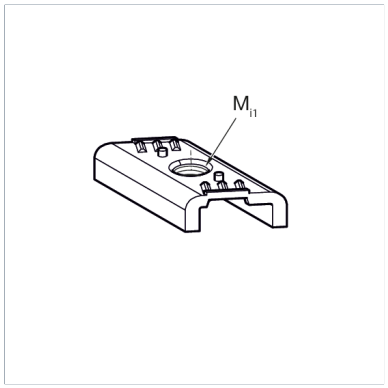

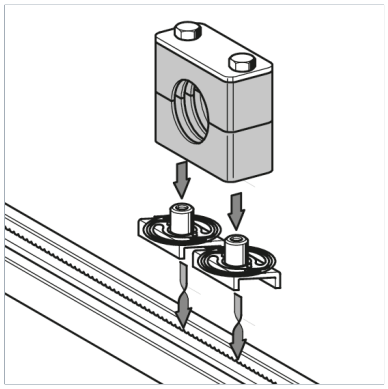

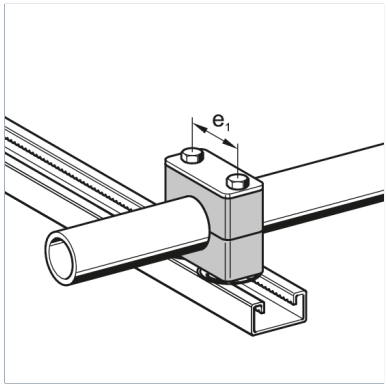

General Information

For efficient assembly of fastening clamps DIN 3015 (light and heavy series) to Channels MS 41. Particularly useable for assembly in vertical channels or positions difficult to access, this piece replaces the '3rd hand' and offers following further advantages: Compatible with all Sikla Channels MS 41, regardless of the channel's height. No getting stuck of screw heads while moving inside the channel. Plane fixation without projecting after tightening.

Installation

After inserting the Adapter CC 41 into the channel opening, slightly press on the thread connection. The piece automatically turns into position. Postion the fastening clamp and tighten the screws.
Neither assembly nor removal require a tool and are repeatable as much as is necessary.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Connecting element material	Spring steel, stainless
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Types

Type	L	Weight	Quantity	Part number
NT CC41 DIN 3015 M 6	21,3 mm	0,036 kg/pcs.	100 pcs.	110005
NT CC41 DIN 3015 M 8	21,3 mm	0,039 kg/pcs.	100 pcs.	110016
NT CC41 DIN 3015 M 10	21,3 mm	0,044 kg/pcs.	100 pcs.	110006
NT CC41 DIN 3015 M 12	21 mm	0,074 kg/pcs.	100 pcs.	110007

Dimensions

Type	Mi1
NT CC41 DIN 3015 M 8	M8
NT CC41 DIN 3015 M 10	M10
NT CC41 DIN 3015 M 12	M12

Certification

Adapter NT CC41 DIN 3015

