



Holding Bracket HK 41 HCP

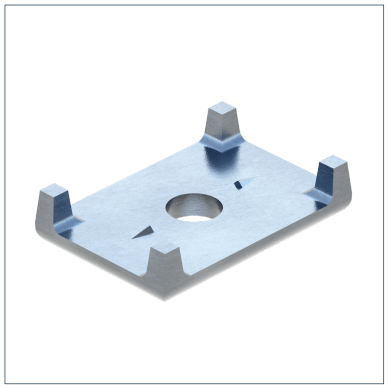

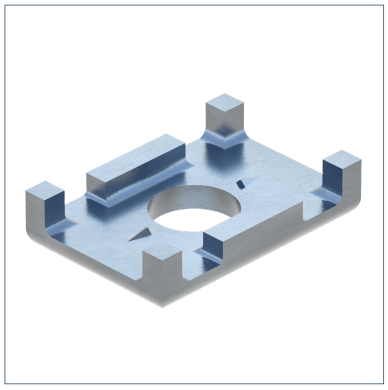

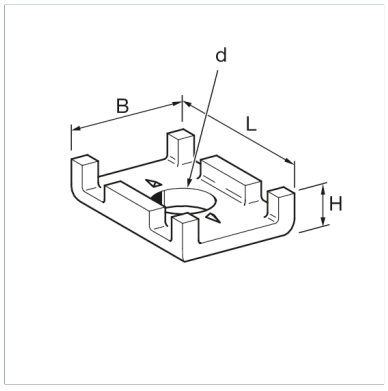

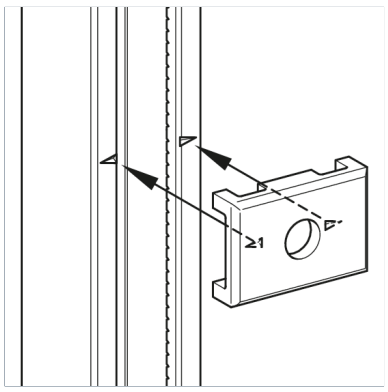

General Information

Safety element for Sikla Channels to be used instead of simple washers. The Holding Bracket prevents the edges along the opening of the channels from bending, and ensures optimum load distribution. When loads are imposed along the Channels, Holding Brackets HK 41 provide for additional safety due to embossed teeth, which penetrate the channel. Suitable for single and double channels. Special blanking guarantee high safety and shear forces after reaching form closure, especially for bolted through connecting elements.

Installation

Suitable for Sikla channels of 41 mm width.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Weight	Quantity	Part number
HK 41/10 HCP	0,059 kg/pcs.	50 pcs.	179606
HK 41/12 HCP	0,069 kg/pcs.	50 pcs.	179615
HK 41/16 HCP	0,071 kg/pcs.	50 pcs.	179624

Dimensions

Type	B	d	H	L
HK 41/10 HCP	41 mm	11 mm	12 mm	35 mm
HK 41/12 HCP	41 mm	13 mm	12 mm	35 mm
HK 41/16 HCP	41 mm	17 mm	12 mm	35 mm

Certification

epd-global
Powered by EPD-Norway

Holding Bracket HK 41 HCP

