
Flat Fitting ECO CC 1

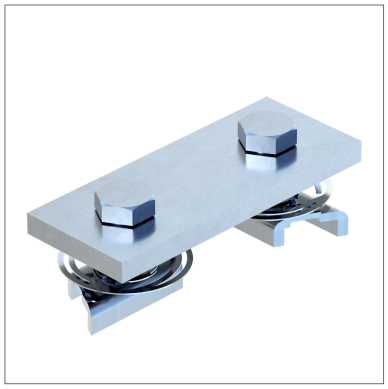

General Information

Pre-assembled connecting element, specifically for frame constructions made of channel. Optimised connection technology, e.g. for creating a T-connection with the Sikla MS 41 system. Locks automatically when being put in place, and supports its own weight. Secure, form-locking, non-positive connection. Completely pre-assembled with serrated CC nut and clamping screw M10. High stiffness.

Installation

Torque: 40 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
ECO CC - 1	2,00 kN

Types

Type	Weight	Quantity	Part number
ECO CC - 1	0,317 kg/pcs.	20 pcs.	181190

Dimensions

Type	BP	HP	HP1	tP
ECO CC - 1	40 mm	101 mm	60 mm	7 mm

Certification