


Tension Tie Rod Disc IR



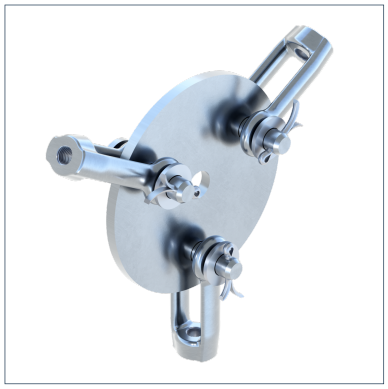

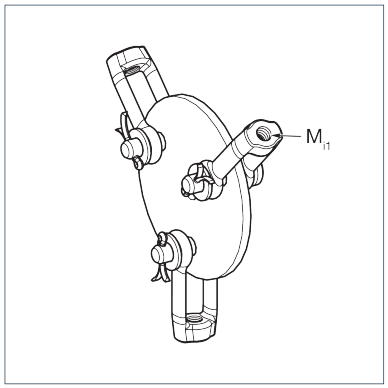

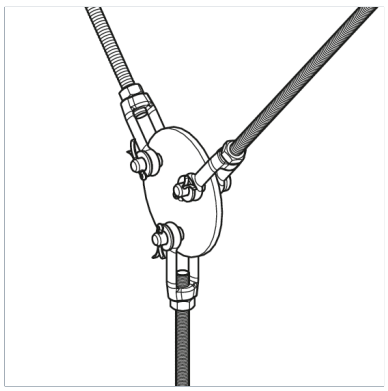

General Information

The Tension Tie Rod Disc IR can be used to fix an installation grid to the building structure. By means of the 3 Threaded Clevis GWB it is possible to create a y-suspension easily. Combined with the Clamping Set SPZ HCP the height adjustment of the installation grid becomes easy.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
IR M10	13,60 kN

Types

Type	Weight	Quantity	Part number
IR M10	0,610 kg/pcs.	8 pcs.	116602

Dimensions

Type	Mi1
IR M10	M10

Certification