



Channel Extension ST 41

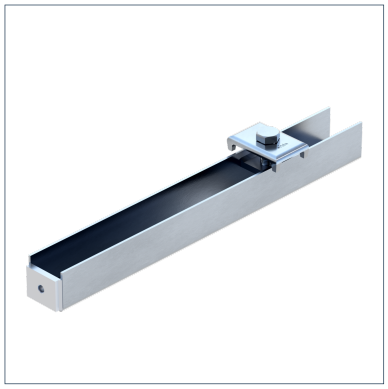

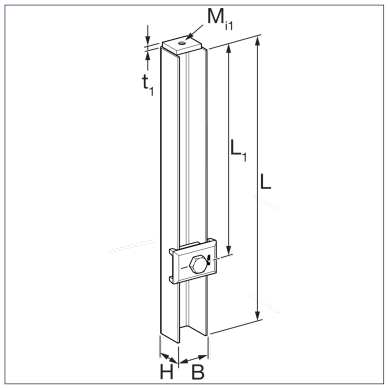

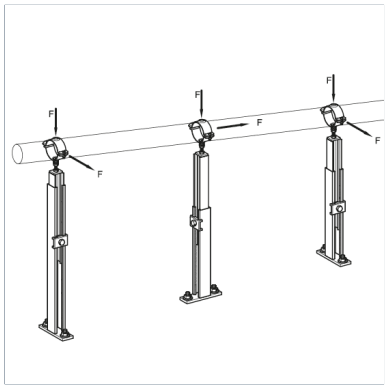

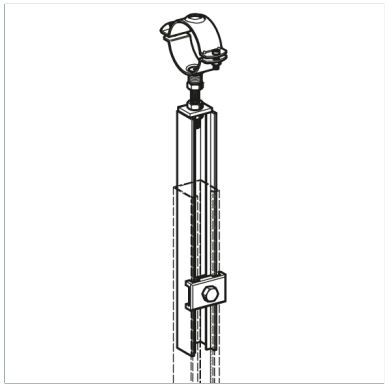

General Information

Highly variable extension piece for channels and channel constructions. Continuously variable from 0 up to 200 mm, simple adjustment, especially for elevated constructions. Ideal for the laying of individual or several pipelines with obligatory declines and for compensation of large tolerances of the building apart from the plans. In combination with Sikla Cantilever Brackets 41/41 continuously variable supports up to 1.2 m height are possible. Suitable for all Sikla Channels MS 41 (height >= 41 mm).

Installation

Tightening torque: 40 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}	V{Z,perm.}
ST 41	1,50 kN	1,50 kN

Note on loadings

Load only achievable if the tightening torque of 40 Nm is observed.

Types

Type	Weight	Quantity	Part number
ST 41	0,678 kg/pcs.	25 pcs.	189740

Dimensions

Type	B	H	L	L1	Mi1	t
ST 41	35 mm	33 mm	310 mm	225 mm	M10	2 mm

Certification