


U-Holder SB 27

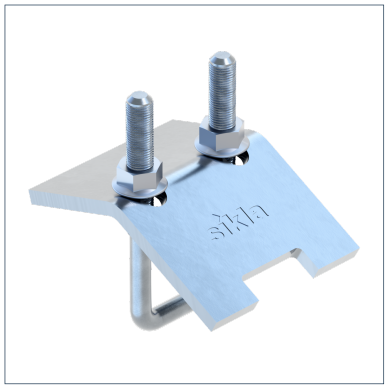

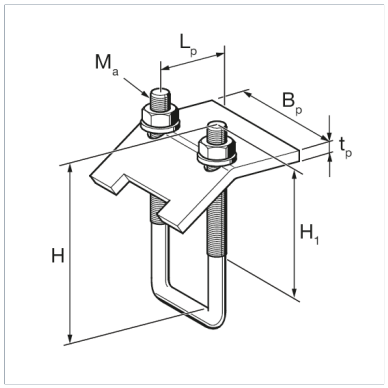

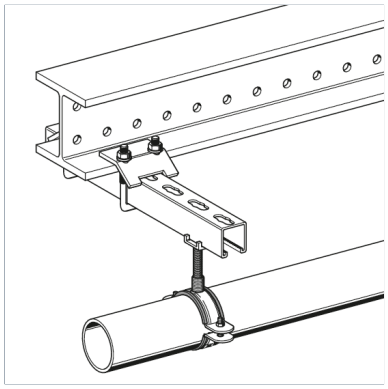

General Information

Connecting element to fix Channel MS 27 to beam- and girder structures. Fixing to the channel regardless the orientation of channel opening or slotted side .

Installation

To be used in pairs only.
Length calculation = Beam/Girder flange thickness + min. 2 x 50 mm overhang.
Max. flange thickness: 25 mm
Tightening torque: 20 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}	V{Z,perm.}
SB 27 M8	2,00 kN	2,00 kN

Note on loadings

Max. perm. Load tension per Beam Clamp.

Types

Type	Weight	Quantity	Part number
SB 27 M8	0,288 kg/pcs.	20 pcs.	195864

Dimensions

Type	BP	H	H1	LP	Ma	tP
SB 27 M8	65 mm	81,5 mm	50 mm	37 mm	M8	5 mm

Certification