
Support Bracket WK 200-350



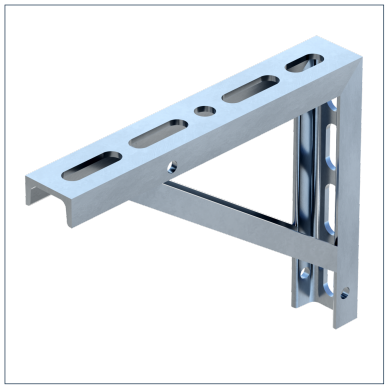

General Information

Sikla Support Brackets may be used for wall, floor and overhead pipe installation. Depending on the site, pipes may lie on the support bracket (U bolt), be arranged in vertical position or be suspended (grub screws). In combination with bolted-on channels, the support brackets offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of cross-bars can be increased by fixing them onto Support Brackets.

Mechanical Properties

Permissible stress σ{perm.}	160,00 N/mm²

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Note on loadings

For load values, see additional documents.

Types

Type	Weight	Quantity	Part number
WK 300/200	2,317 kg/pcs.	1 pcs.	118046
WK 550/350	4,510 kg/pcs.	1 pcs.	145635

Dimensions

Type	b	d	d1	H	H1	H2	H3	H4	H5	L	L1	L2	L3	L4	L5	L6
WK 300/200	17 mm	17 mm	10,5 mm	240 mm	38 mm	89,5 mm	147 mm	205 mm	210 mm	315 mm	40 mm	100 mm	150 mm	200 mm	270 mm	210 mm
WK 550/350	17 mm		10,5 mm	350 mm	47 mm	322 mm				550 mm	102,5 mm	279,5 mm	456,5 mm	365 mm		

Certification

Support Bracket WK 200-350

Documents

Angle Bracket WK - Sikla Product Details (300-200)

Angle Bracket WK - Sikla Product Details (550-350)