

Fixing Bracket MW S HCP

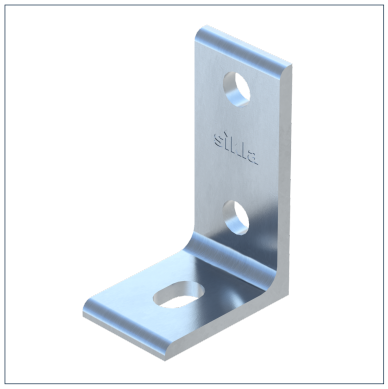

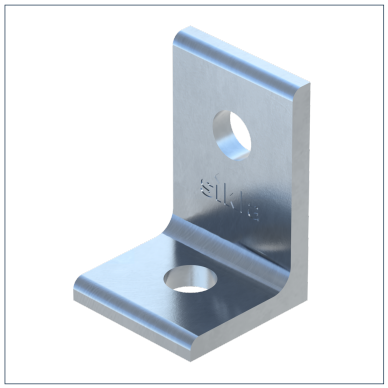

General Information

Designed for general mounting purposes as a direct lateral attachment link integrated in binding and bridging beams of concrete or wood, and for similar applications. It may serve as a connecting bracket for framework structures consisting of channels.

Installation

For sprinkler systems smaller than DN 150.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	V{Z,perm.}
MW S 60/40/90° HCP	7,50 kN
MW S 90/60/90° HCP	7,50 kN

Types

Type	Weight	Quantity	Part number
MW S 60/40/90° HCP	0,185 kg/pcs.	25 pcs.	162063
MW S 90/60/90° HCP	0,273 kg/pcs.	25 pcs.	162072

Dimensions

Type	B	b	d	H1	H2	L1
MW S 60/40/90° HCP	40 mm		13 mm	20 mm		20 mm
MW S 90/60/90° HCP	40 mm	13 mm	13 mm	15 mm	50 mm	26,5 mm

Certification

Stahl

epd-global
Powered by EPD-Norway

Documents

Installation - Fixing Bracket MW S