
Support Bracket WK 200-350 HCP



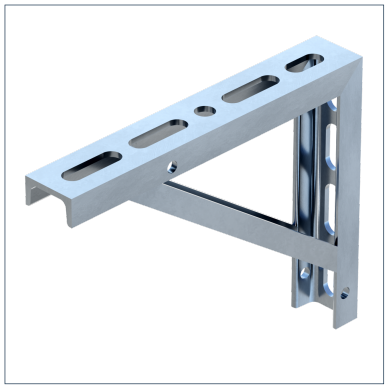

General Information

Sikla Support Brackets may be used for wall, floor and overhead pipe installations. Depending on the site, pipes may lie on the support bracket (U-bolt), be arranged in vertical position or be suspended (Grub Screws). In combination with bolted-on channels, the support brackets offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of crossbars can be increased by fixing them onto Support Brackets.

Mechanical Properties

Permissible stress σ{perm.}	160,00 N/mm²

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Note on loadings

For load values, see additional documents.

Types

Type	Weight	Quantity	Part number
WK 300/200 HCP	2,275 kg/pcs.	1 pcs.	162531
WK 550/350 HCP	4,621 kg/pcs.	1 pcs.	162610

Dimensions

Type	b	d	d1	H	H1	H2	H3	H4	H5	L	L1	L2	L3	L4	L5	L6
WK 300/200 HCP	17 mm	17 mm	10,5 mm	240 mm	38 mm	89,5 mm	147 mm	205 mm	210 mm	315 mm	40 mm	100 mm	150 mm	200 mm	270 mm	210 mm
WK 550/350 HCP	17 mm		10,5 mm	350 mm	47 mm	322 mm				550 mm	102,5 mm	279,5 mm	456,5 mm	365 mm		

Certification

Support Bracket WK 200-350 HCP

Documents

Angle Bracket WK - Sikla Product Details (300-200)

Angle Bracket WK - Sikla Product Details (550-350)