

Support Bracket WK 100-200 CC

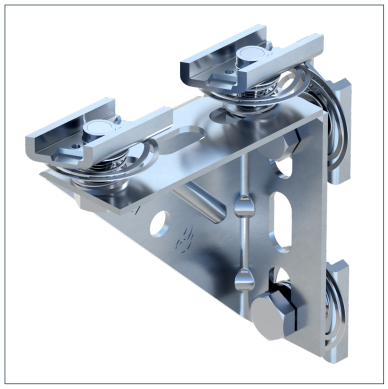

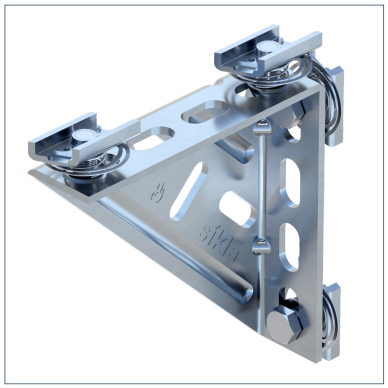

General Information

Suitable for use in connection with Sikla Channels. In combination with bolted-on channels, they offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of cross-bars can be increased by fixing them onto Support Brackets.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Connecting element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Types

Type	Weight	Quantity	Part number
WK CC - 100/100-40	0,408 kg/pcs.	25 pcs.	191774
WK CC - 150/150	0,805 kg/pcs.	10 pcs.	191783

Dimensions

Type	B	b	H	H1	H2	H3	H4	L	L1	L2	L3	L4	t
WK CC - 100/100-40	40 mm	11 mm	100 mm	23,5 mm	53,5 mm	83,5 mm		100 mm	23,5 mm	53,5 mm	83,5 mm		2,5 mm
WK CC - 150/150	40 mm	13 mm	150 mm	25,25 mm	59,75 mm	94,25 mm	128,75 mm	150 mm	25,25 mm	59,75 mm	94,25 mm	128,75 mm	4 mm

Certification