


Channel Lining SAL 41

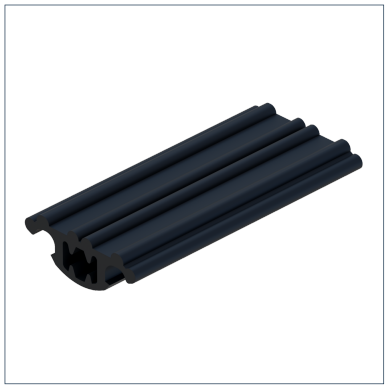

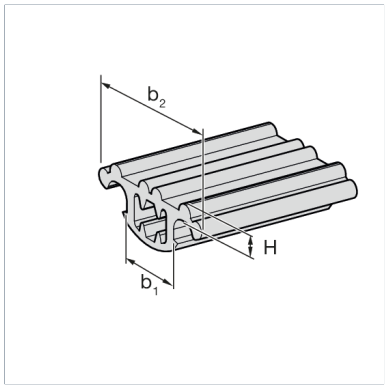

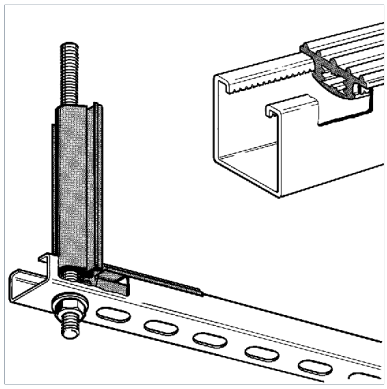

General Information

Sound Absorption Lining for inserting into Sikla Channels or fitting around threaded rods; mainly for use in ducting systems, also for sound proof installations as per DIN 4109.

Installation

Thread connection: M8/M10
For Sikla Channel opening: 22 mm

Temperature

Max. temperature	110 °C
Min. temperature	-50 °C

Material Properties

Hardness	50°+/-5° Shore
Halogen-free	0
UV-resistant	0

Material

Primary element material	SBR/EPDM

Fire Performance

Class B2 according to DIN 4102

Types

Type	Weight	Quantity	Part number
SAL 41	0,476 kg/m	30 m	101189
SAL 41 L 50	0,026 kg/pcs.	100 pcs.	101204

Dimensions

Type	b1	b2	H
SAL 41	22 mm	48,5 mm	5 mm
SAL 41 L 50	22 mm	48,5 mm	5 mm

Certification

epd-global
Powered by EPD-Norway