



Assembly Group BG15 F 80-1/2'' HCP

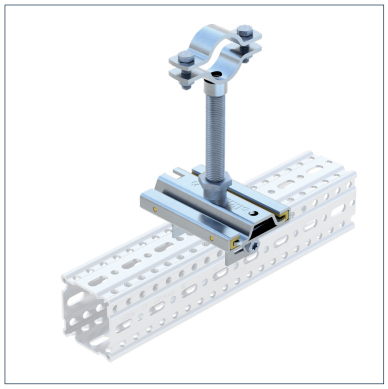

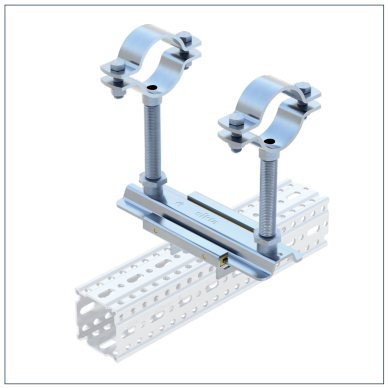

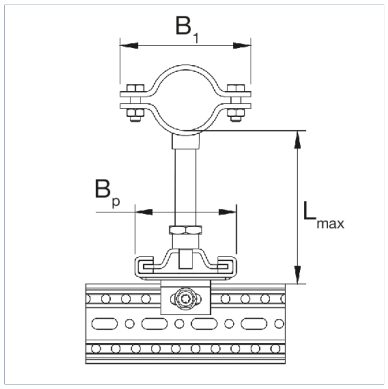

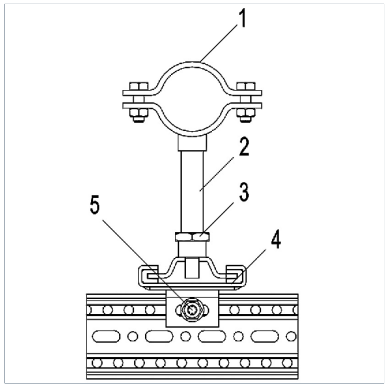

General Information

An Assembly Group for use as a guided support with the heavy Pipe Clamp Stabil I-1/2'. The Assembly Group is designed for use with the Beam Section TP F 80. It is connected using the Self Forming Screw FLS F, and the height is adjusted via the Threaded Tube 1/2'. From DN 65 upwards, the Slide Set GS F 80 1G2 is used to create two pipe supports.

Installation

The assembly of the individual components to form an Assembly Group is carried out during the course of pipe installation on the construction site.

L(max, horizontal) = not recommended

Material Properties

Halogen-free	0
UV-resistant	0


Material

Primary element material	steel
Connecting element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
BG15 F 80-1/2'' DN 15 HCP	16,00 mm	22,00 mm	DN 15 (1/2")	1,980 kg/ pcs.	1 pcs.	110227
BG15 F 80-1/2'' DN 20 HCP	23,00 mm	27,00 mm	DN 20 (3/4")	1,990 kg/ pcs.	1 pcs.	110228
BG15 F 80-1/2'' DN 25 HCP	30,00 mm	34,00 mm	DN 25 (1")	2,020 kg/ pcs.	1 pcs.	110229
BG15 F 80-1/2'' DN 32 HCP	39,00 mm	44,00 mm	DN 32 (1 1/4")	2,060 kg/ pcs.	1 pcs.	110230
BG15 F 80-1/2'' DN 40 HCP	44,00 mm	49,00 mm	DN 40 (1 1/2")	2,080 kg/ pcs.	1 pcs.	110231
BG15 F 80-1/2'' DN 50 HCP	57,00 mm	61,00 mm	DN 50 (2")	2,300 kg/ pcs.	1 pcs.	110232
BG15 F 80-1/2'' DN 65 HCP	73,00 mm	77,00 mm	DN 65 (2 1/2")	3,740 kg/ pcs.	1 pcs.	110233
BG15 F 80-1/2'' DN 80 HCP	85,00 mm	89,00 mm	DN 80 (3")	3,860 kg/ pcs.	1 pcs.	110234
BG15 F 80-1/2'' DN 100 HCP	109,00 mm	116,00 mm	DN 100 (4")	4,440 kg/ pcs.	1 pcs.	110235

Assembly Group BG15 F 80-1/2'' HCP

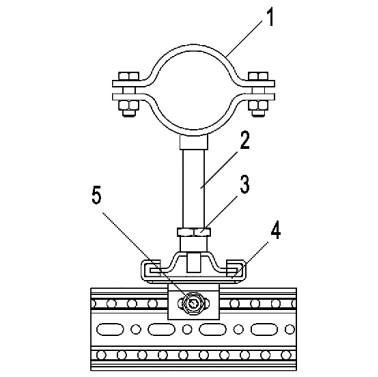

Dimensions

Type	B1	BP	Lmax
BG15 F 80-1/2'' DN 15 HCP	85 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 20 HCP	92 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 25 HCP	100 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 32 HCP	112 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 40 HCP	117 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 50 HCP	139 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 65 HCP	156 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 80 HCP	168 mm	102 mm	200 mm
BG15 F 80-1/2'' DN 100 HCP	194 mm	102 mm	200 mm

Certification