



Roof Connector DF AV HCP

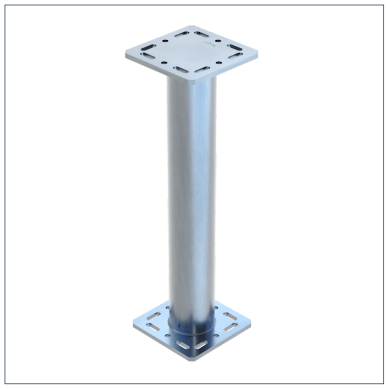

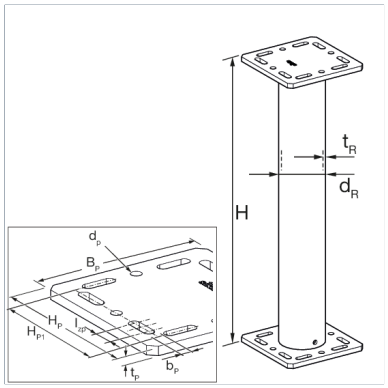

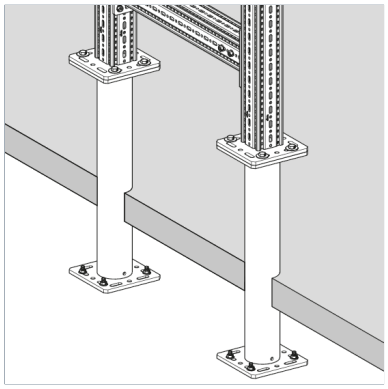

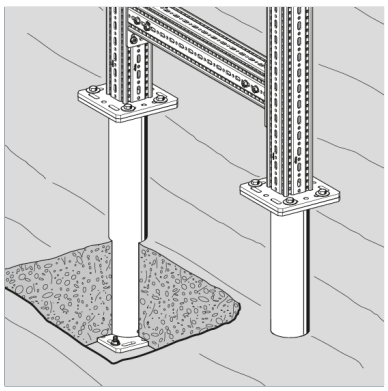

General Information

Enables direct connection of constructions with siFramo using WBD brackets F 80/100 of size 80/120 or girder brackets F 80/100 on various roof types.

Installation

Connection of WBD brackets F 80/100 - 80/120 and TKO F 80/100 by means of 4 hexagon bolts M12 and suitable washers and nuts.
Fastening on roofs and on concrete by means of heavy-duty anchors M12.
Important: The zinc drain holes in the support tube must be sealed after installation. If insulation is required in the support tube, it can be provided by the customer, e.g. by foaming.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Weight	Quantity	Part number
DF AV 750 HCP	20,5 kg/pcs.	1 pcs.	117170

Dimensions

Type	BP	bP	dP	dR	H	HP	HP1	lzP	tP	tR
DF AV 750 HCP	220 mm	14 mm	14 mm	114,3 mm	705 mm	220 mm	170 mm	30 mm	12 mm	7,1 mm

Certification

Stahl