



Flange Screw SCR FLA TT HCP

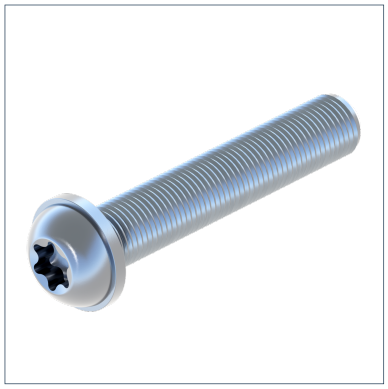

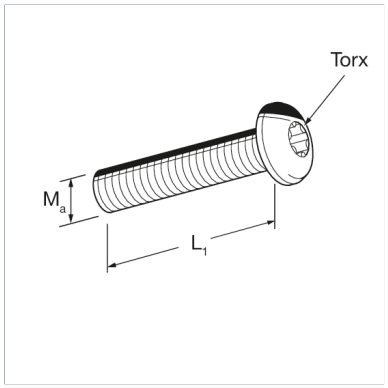

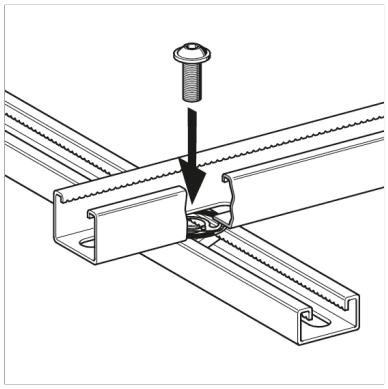

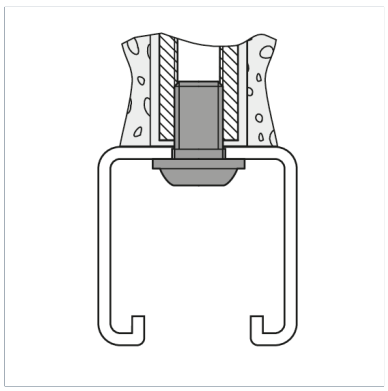

General Information

The Flange Screws are self-forming screws. Type TT M10 x 60 is only suitable for connecting mounting rails <= 41 mm high with siFramo profiles.

Installation

The maximum admissible tightening torque strictly has to be observed.
Max. adm. tightening torque: 20 Nm
Drive: Torx-T50

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	L	Weight	Quantity	Part number
SCR FLA TT M10x 30 HCP	30,00 mm	0,024 kg/pcs.	100 pcs.	116479
SCR FLA TT M10x 60 HCP		0,038 kg/pcs.	100 pcs.	116817

Dimensions

Type	L	Ma
SCR FLA TT M10x 30 HCP	37,3 mm	M10
SCR FLA TT M10x 60 HCP	67,3 mm	M10

Certification

Stahl

epd-global
Powered by EPD-Norway

Flange Screw SCR FLA TT HCP

