

Fixed Point Bracket XW F 80 HCP

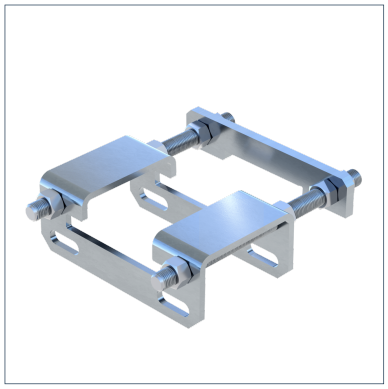

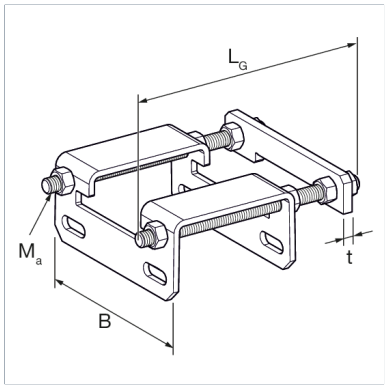

General Information

Element for modification of Sliding Pipe Shoes to Fixed Point Pipe Shoes on siFramo TP F 80 beam sections.

Installation

The slide plate of the Pipe Shoe is disassembled. Connection to Beam Sections TP F 80 and 80/30 means of 4 Self-Forming Screws FLS F.

Axial fixed point forces can only be attained by the professional use of anti-slip protections (e.g. cleats, stoppers). Those have to be planned during the design of the piping and are on the responsibilty of the piping manufacturer.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Additional information

Also available with DualShield for high corrosion protection within C5H environments.

Types

Type	Weight	Quantity	Part number
XW F 80 HCP	1,3 kg/pcs.	1 pcs.	110356

Dimensions

Type	B	LG	Ma	t
XW F 80 HCP	160 mm	200 mm	M12	8 mm

Certification