

Guiding Bracket FW F100 HCP

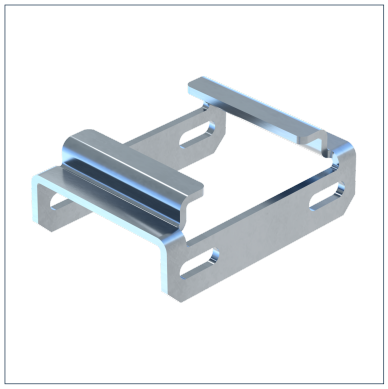

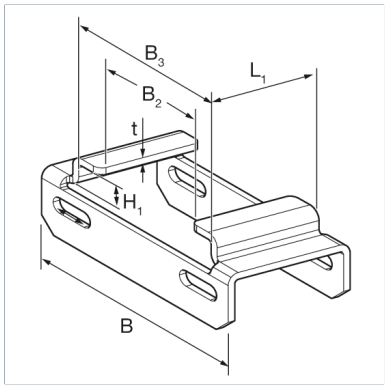

General Information

Element for modification of siMotec Sliding Pipe Shoes to Guided Pipe Shoes on siFramo F100 beam sections.

Installation

Connection to Beam Sections TP F 100 and 100/160 by means of 4 Self-Forming Screws FLS F.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Additional information

Also available with DualShield for high corrosion protection within C5H environments.

Types

Type	Weight	Quantity	Part number
FW F100 HCP	0,727 kg/pcs.	1 pcs.	113088

Dimensions

Type	B	B1	B2	B3	L	L1	H1	t
FW F100 HCP	155 mm	105 mm	77 mm	110 mm	111 mm	96 mm	16,5 mm	5 mm

Certification