


Guiding Bracket FW F 80 - L HCP

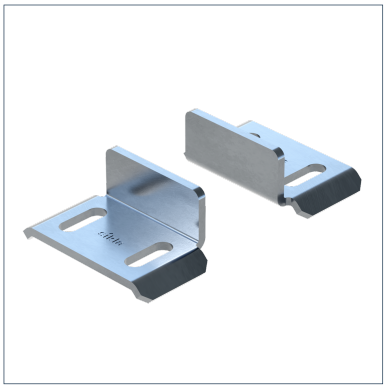

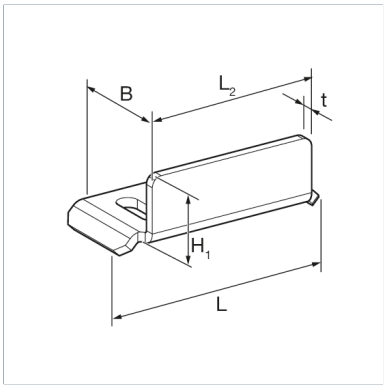

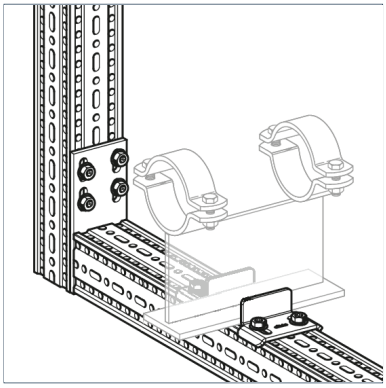

General Information

Using the Guiding Bracket FW F it's possible to guide Pipe Shoes with different plate thicknesses on siFramo F80 beam sections. Type L can guide the Pipe Shoe in the axial direction, but does not have any lift-off protection.

Installation

Installation on top of Beam Section TP F 80 with 2 Self Forming Screws FLS F per Guiding Bracket, i.e. per set 4 Self Forming Screws have to be used altogether. You can find the Self Forming Screw in the siFramo chapters.
Please ensure a clearance of 3 mm in the horizontal y-axis for all types.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	V{Y,perm.}
FW-L F 80 HCP	1,90 kN

Additional information

Also available with DualShield for high corrosion protection within C5H environments.

Types

Type	Weight	Quantity	Part number
FW-L F 80 HCP	0,509 kg/Set	25 Set	113627

Dimensions

Type	B	H1	L	L1	t
FW-L F 80 HCP	56,5 mm	35 mm	97 mm	50 mm	5 mm

Certification