


Profile Lining SAL 46

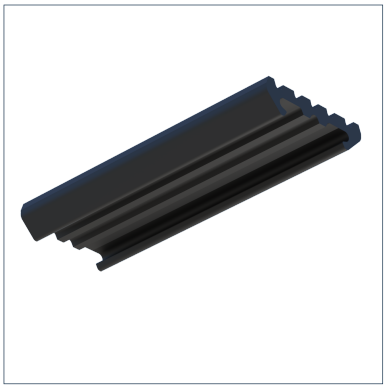

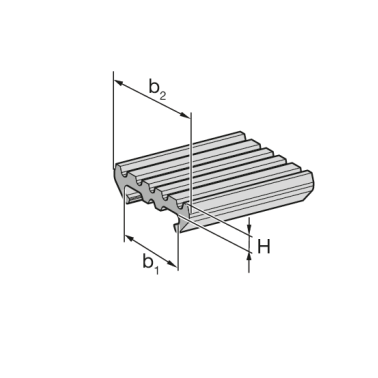

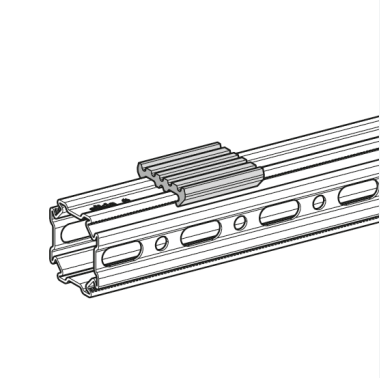

General Information

Sound absorption lining for inserting into Profiles PRO 46. Mainly for use in ducting systems, also for sound proof installations as per DIN 4109.

Temperature

Max. temperature	110 °C
Min. temperature	-40 °C

Material Properties

Hardness	45°+/-5° Shore
Halogen-free	0
UV-resistant	0

Material

Primary element material	SBR/EPDM

Fire Performance

Class B2 according to DIN 4102

Types

Type	Roll	Weight	Quantity	Part number
SAL 46	30 m	0,3 kg/m	30 m	802160
SAL 46 L 50		0,015 kg/pcs.	100 pcs.	802161

Dimensions

Type	b1	b2	H
SAL 46	32,8 mm	45 mm	5,5 mm
SAL 46 L 50	32,8 mm	45 mm	5,5 mm

Certification

epd-global
Powered by EPD-Norway