
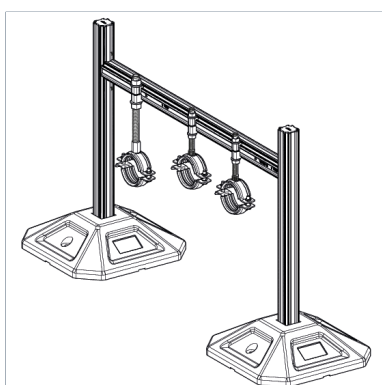


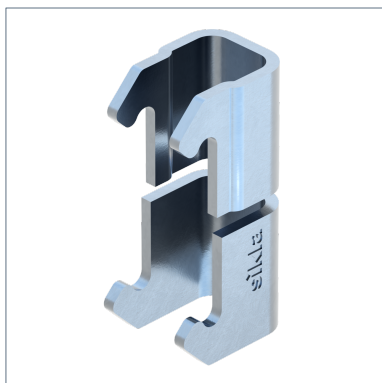

General Information

With the Profile Clip MPK 46, threaded rods can be connected to the side of the Profile PRO 46 in a stepless manner. The height adjustment of the pipe clamp is also not limited. Due to the small installation footprint and offset lateral profile mounting, the clamp ears can be positioned to overlap one another.

Installation

Hook the Profile Clip MPK 46 into place on one side and snap it on by pressing in the middle. Then push the threaded rod through, set the required height and lock it with a nut at the top and bottom.

Tightening torque: 15 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{X,perm.}	V{X,perm.}	-V{Y,perm.}	V{Y,perm.}	-V{Z,perm.}	V{Z,perm.}
MPK 46 M 8 HCP	0,84 kN	0,84 kN	0,52 kN	0,52 kN	2,92 kN	2,92 kN
MPK 46 M10 HCP	0,84 kN	0,84 kN	0,52 kN	0,52 kN	2,92 kN	2,92 kN
MPK 46 M12 HCP	0,84 kN	0,84 kN	0,52 kN	0,52 kN	2,92 kN	2,92 kN
MPK 46 M16 HCP	0,84 kN	0,84 kN	0,52 kN	0,52 kN	2,92 kN	2,92 kN

Moments

Type	-M{X,perm.}	M{X,perm.}	-M{Y,perm.}	M{Y,perm.}
MPK 46 M 8 HCP	0,05 kNm	0,05 kNm	0,04 kNm	0,04 kNm
MPK 46 M10 HCP	0,05 kNm	0,05 kNm	0,04 kNm	0,04 kNm
MPK 46 M12 HCP	0,05 kNm	0,05 kNm	0,04 kNm	0,04 kNm
MPK 46 M16 HCP	0,05 kNm	0,05 kNm	0,04 kNm	0,04 kNm

Additional information

Also available as pre-assembled module BG-MPK 46.

Types

Type	Weight	Quantity	Part number
MPK 46 M 8 HCP	0,02 kg/pcs.	200 pcs.	803862
MPK 46 M10 HCP	0,03 kg/pcs.	100 pcs.	803863
MPK 46 M12 HCP	0,03 kg/pcs.	100 pcs.	803864
MPK 46 M16 HCP	0,035 kg/pcs.	100 pcs.	803865

Certification

