
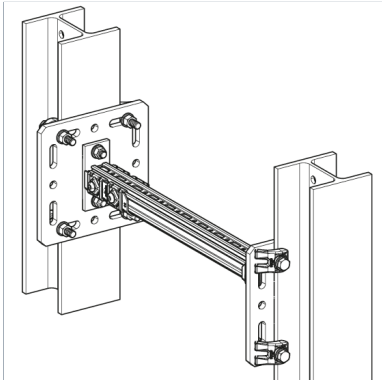
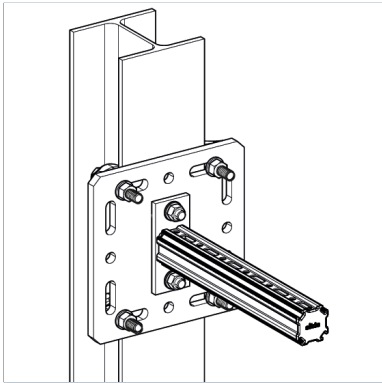
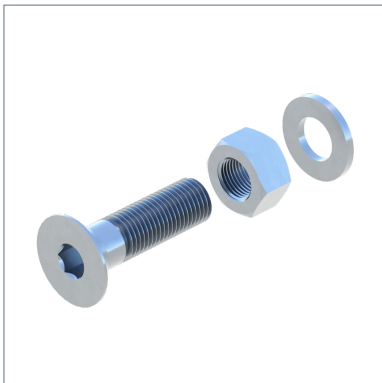


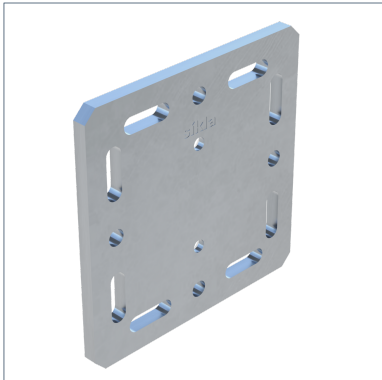

General Information

Interface element to enable the connection of a Cantilever Bracket AK 46 or a WBD 46 to steel beams with beam flange widths of 80 to 120 mm.

Installation

Form locking connection of joining plate with Cantilever Bracket AK 46 or WBD 46 using countersunk Screws and nuts. Force-locking fastening to steel beams using Assembly Set MS 5P M12 S.

Round holes for	Connection to flange width [mm]	Tightening torque Mounting Set [Nm]
M12	80 - 120	81

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Min. flange width	Weight	Quantity	Part number
AP 46 80/120 HCP	80,00 mm	3,99 kg/pcs.	1 pcs.	802158

Dimensions

Type	BP	bP	dP	HP	HP1	l _z P	tP
AP 46 80/120 HCP	220 mm	14 mm	14 mm	220 mm	170 mm	30 mm	12 mm

Certification



Powered by EPD-Norway

