



Bracket Plates FV 100/120 HCP

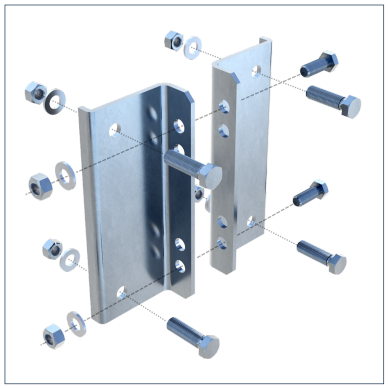

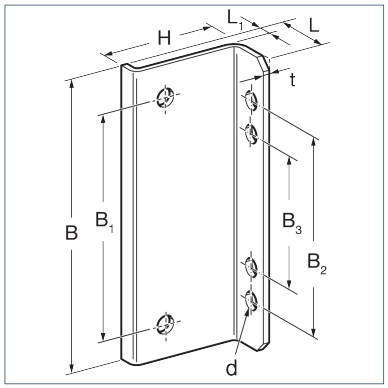

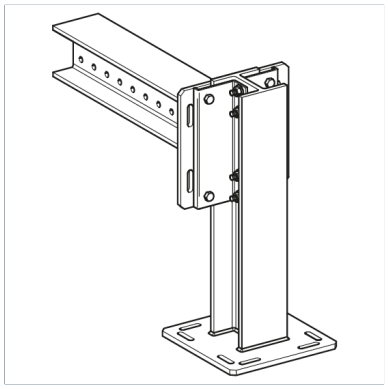

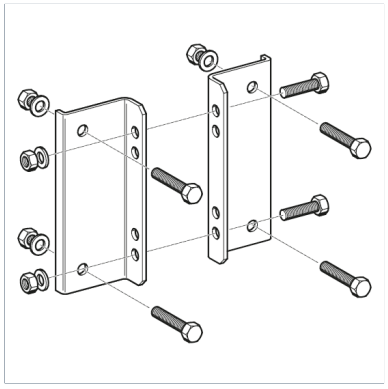

General Information

For safe interlocking connection of a Beam Bracket or an End Support STA to other Beam Brackets TKO (adjustment as per grid with 25 or 50 mm).

Installation

Mount Bracket Plates to Beam Bracket TKO by using 2 Hexagon Bolts M12 x 35. Then attach requested Beam Bracket TKO or End Support STA by using 4 Hexagon Bolts M12 x 45.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Connecting element material	steel
Surface finish	HCP
Corrosion protection class	C4

Additional information

Also available with DualShield for high corrosion protection within C5H environments.

Types

Type	Weight	Quantity	Part number
FV-SET 100/120 HCP	2,500 kg/pcs.	1 pcs.	187616

Dimensions

Type	B	B1	B2	B3	d	H	L	L1	t
FV-SET 100/120 HCP	220 mm	170 mm	150 mm	100 mm	13,5 mm	90 mm	49 mm	11 mm	5 mm

Certification

Stahl

Documents

Static Guideline - siFramo & siMotec