


Safety Strap SL

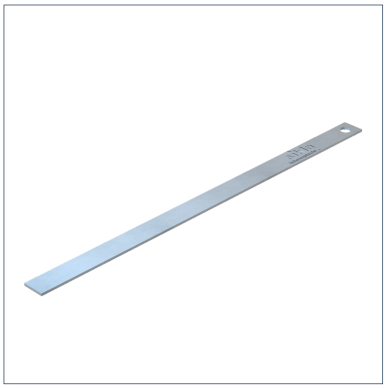

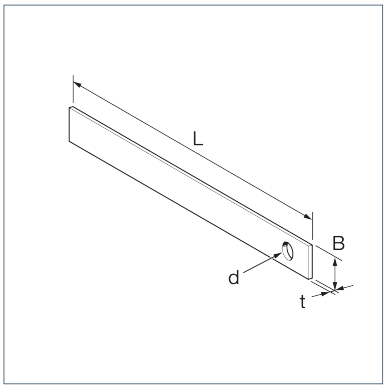

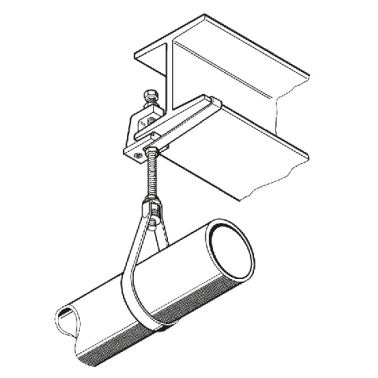

General Information

Additional safety feature for Beam Clamps supporting tubes of nominal diameter DN 80 and larger, required for installations meeting the Vds standard. Dimensions and material meet the VdS CEA-guideline for Sprinkler systems.

Installation

The safety strap is bent on the construction site to the form of the beam, so that it securely encompasses the edge of the beam flange.

Application:
Type 1: DN 80 - NB 100
Type 2: DN 125 - NB 150
Type 3: DN 200

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	hot dip galvanized
Corrosion protection class	C2

Types

Type	Weight	Quantity	Part number
SL 1	0,164 kg/pcs.	50 pcs.	116798
SL 2	0,236 kg/pcs.	50 pcs.	116804
SL 3	0,363 kg/pcs.	50 pcs.	116813

Dimensions

Type	B	d	L	t
SL 1	21,5 mm	11 mm	400 mm	2,5 mm
SL 2	30 mm	13 mm	400 mm	2,5 mm
SL 3	40 mm	17 mm	400 mm	3 mm

Certification