

Hollow Core Anchor AN Easy

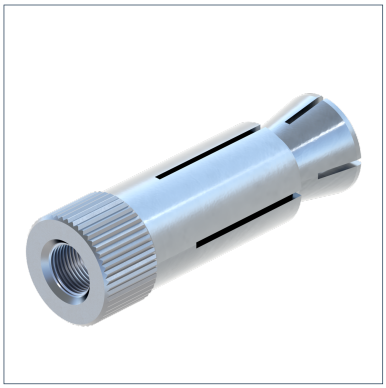

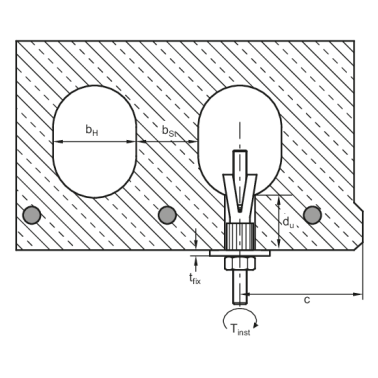

General Information

Internal thread anchor to be used in pre-stressed hollow concrete slabs. Suitable for suspension of pipe lines, channels, etc. considering the approval regulations for the use with threaded rods or screw. Only to be used with construction components under dry indoor conditions. The general technical approval allows the anchor to be installed even if the drill hole does not hit the cavity.

Installation

Tightening the screw or nut pulls the expansion cone inside the anchor sleeve which keys into the cavity. The anchor spreads Y-shaped inside the hollow space and using the specified torque gives secure form closure.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Additional information

Types M8 and M12 Delivery date on request

Types

Type	L	Weight	Quantity	Part number
AN EASY M 8	45,00 mm	0,010 kg/pcs.	50 pcs.	110463
AN EASY M10	53,00 mm	0,033 kg/pcs.	50 pcs.	110465
AN EASY M12	58,00 mm	0,043 kg/pcs.	25 pcs.	110466

Certification

Approval: Z-21.1-1785, Fire Protection Eximantion, VdS-Approval

Documents

Hollow-Core Anchor AN Easy - Technical Data