


Support Cone SMD 1



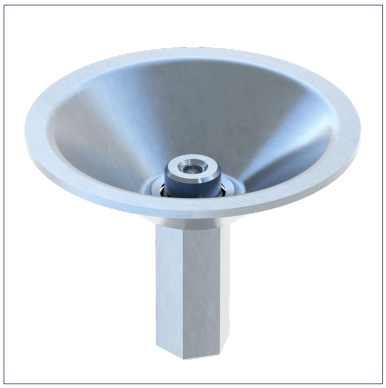

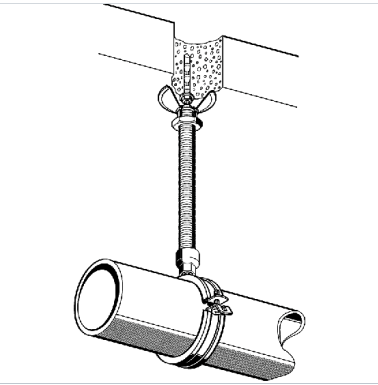

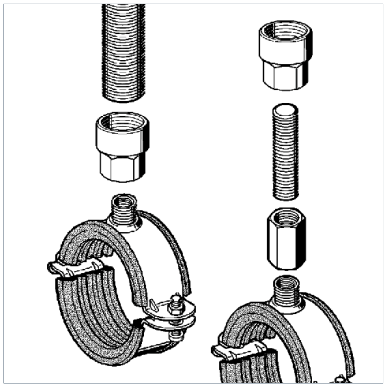

General Information

Single-point mounting element for use with an anchor for floor, wall and ceiling mounting in M&E services. With its good overall stability, the Support Cone SMD 1 may also be used as a fixed-point mounting element in certain areas. In that case the permissible values for the lateral forces indicated in the characteristic curve are to be taken into consideration. This also applies to wall mounting situations. When used as fixed-point mounting element the pipe clamp is to be connected directly to the support tube. When used as a normal, rigid mounting element, a grub screw may be used between support tube and pipe clamp for height adjustment.

Mechanical Properties

Permissible stress σ{perm.}	160,00 N/mm²

Material Properties

Halogen-free	0
UV-resistant	0

Material


Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2


Types

Type	Weight	Quantity	Part number
SMD 1 - 10	0,24 kg/pcs.	25 pcs.	112382
SMD 1 - 12	0,275 kg/pcs.	25 pcs.	117513
SMD 1 - 16	0,26 kg/pcs.	25 pcs.	117984
SMD 1 - 1/2''	0,241 kg/pcs.	25 pcs.	118125
SMD 1 - 3/4''	0,265 kg/pcs.	25 pcs.	118134

Certification

Support Cone SMD 1

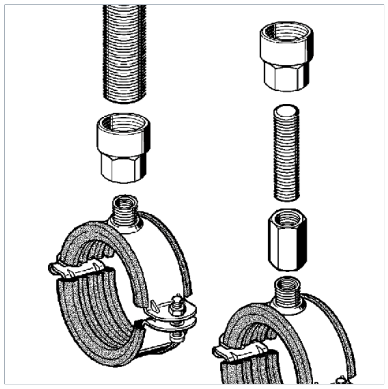

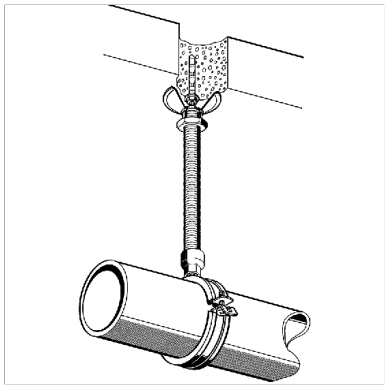

Documents

Loads – Support Cone SMD 1