
# Universal Plug ANA

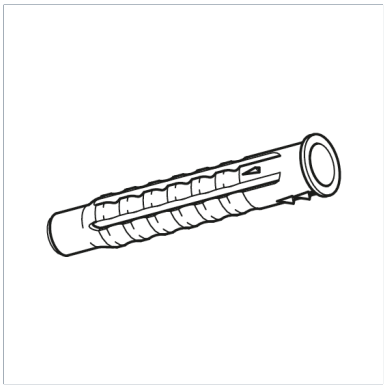

## General Information

The Universal Plug with collar is suitable for all concrete material and masonry, perforated and hollow bricks, boards. The torsion protection prevents rotation in the drill hole. The installation in cavities causes a knot and therefore an interlocking connection. The stiff plug neck prevents damage of tiles and plaster. The collar serves as stop an prevents the plug from slipping deeper into the drill hole.

## Temperature

| | |
|---|---|
| Max. temperature | 70 °C |
| Min. temperature | -40 °C |

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Corrosion protection class | C2 |

## Note on loadings

For information on load values, see documents.

## Additional information

Type 6 x 30: Delivery date on request – goods are procured on an order-by-order basis.

## Types

| Type | L | Screw diameter min./max. (mm) | Weight | Quantity | Part number |
|---|---|---|---|---|---|
| ANA 6 X 30 | 30,00 mm | 3,5 / 5,0 | 0,007 kg/pcs. | 100 pcs. | 402430 |
| ANA 8 X 40 | 40,00 mm | 4,5 / 6,0 | 0,001 kg/pcs. | 100 pcs. | 402431 |
| ANA 10 X 50 | 50,00 mm | 6,0 / 8,0 | 0,003 kg/pcs. | 50 pcs. | 402432 |
| ANA 12 X 60 | 60,00 mm | 8,0 / 10,0 | 0,005 kg/pcs. | 25 pcs. | 402433 |
| ANA 14 X 70 | 70,00 mm | 10,0 / 12,0 | 0,008 kg/pcs. | 20 pcs. | 402434 |

## Certification

epd-global
Powered by EPD-Norway

## Documents

Universal Plug ANA - Technical Data