
Ring Bolt SCR DIN 912

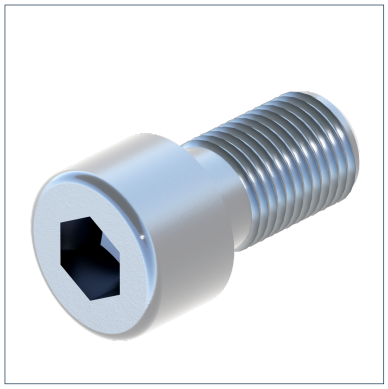

Installation

Type M8 x 16 may be also used as connecting element for Channels with slot pattern II.
Maximum distance between two clamping units: 250 mm.
At the ends, each one unit has to be mounted.
Tightening torque M = 25 Nm.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Types

Type	L	Weight	Quantity	Part number
SCR M 8X 16 DIN912	16,00 mm	0,012 kg/pcs.	100 pcs.	114185

Certification