
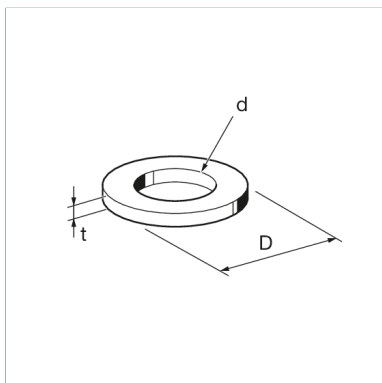
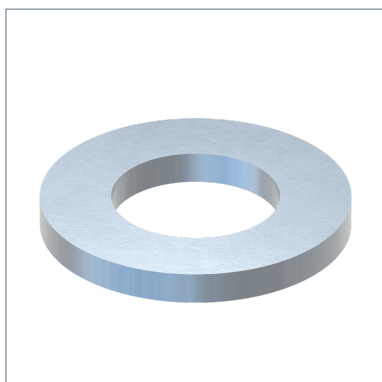


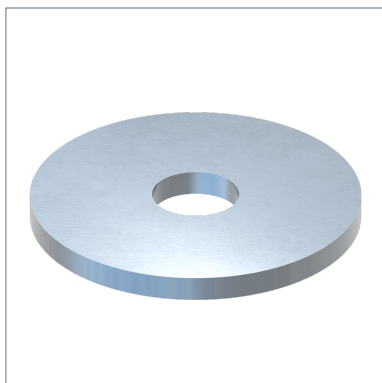

General Information

Sikla washers US are used for form-fitting and secure support of connecting elements. They enable even force distribution and protect the surface of the fastening components. Suitable for use in combination with screws and threaded rods in various installation situations – especially in constructions with mounting rails and support systems.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Types

Type	DIN	Weight	Quantity	Part number
US 8/125 140 HV	125	0,002 kg/pcs.	100 pcs.	125329
US 8/9021 100 HV	9021	0,006 kg/pcs.	100 pcs.	137883
US 8/40 140 HV		0,022 kg/pcs.	100 pcs.	105581
US 8/ 45 140 HV		0,044 kg/pcs.	100 pcs.	105624
US 10/125 140 HV	125	0,003 kg/pcs.	100 pcs.	137564
US 10/9021 100 HV	9021	0,011 kg/pcs.	100 pcs.	125365
US 10/40 140 HV		0,023 kg/pcs.	100 pcs.	105590
US 10/45 140 HV		0,043 kg/pcs.	100 pcs.	105633
US 12/125 140 HV	125	0,006 kg/pcs.	100 pcs.	114246
US 12/30 140 HV		0,011 kg/pcs.	100 pcs.	156462
US 12/40 140 HV		0,024 kg/pcs.	100 pcs.	105606
US 12/440 100 HV	440	0,037 kg/pcs.	100 pcs.	125374
US 16/125 140 HV	125	0,01 kg/pcs.	100 pcs.	114255
US 16/40 140 HV		0,022 kg/pcs.	100 pcs.	105615

Dimensions

Type	D	d	t
US 8/125 140 HV	16 mm	8,4 mm	1,6 mm
US 8/9021 100 HV	24 mm	8,4 mm	2 mm
US 8/40 140 HV	40 mm	8,4 mm	3 mm
US 8/ 45 140 HV	45 mm	8,4 mm	4 mm

Type	D	d	t
US 10/125 140 HV	20 mm	10,5 mm	2 mm
US 10/9021 100 HV	30 mm	10,5 mm	2,5 mm
US 10/40 140 HV	40 mm	10,5 mm	3 mm
US 10/45 140 HV	45 mm	11 mm	4 mm
US 12/125 140 HV	24 mm	13 mm	2,5 mm
US 12/30 140 HV	30 mm	13 mm	2,5 mm
US 12/40 140 HV	40 mm	13 mm	3 mm
US 12/440 100 HV	44 mm	13,5 mm	4 mm
US 16/125 140 HV	30 mm	17 mm	3 mm
US 16/40 140 HV	40 mm	16,3 mm	3 mm

Certification

