
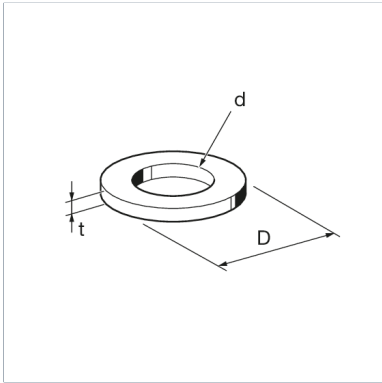
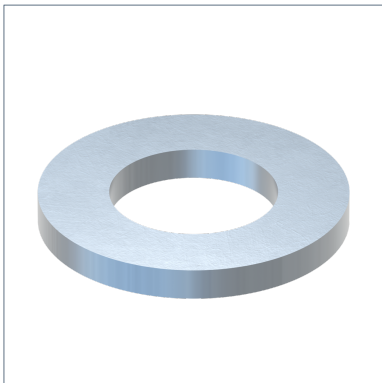


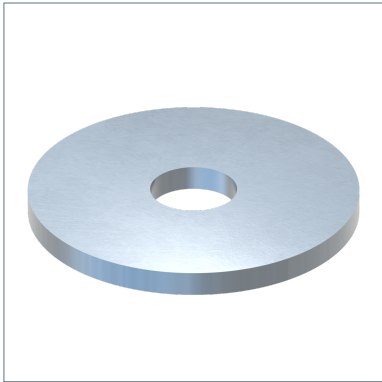

General Information

Sikla washers US are used for the form-fitting and secure support of connecting elements. They enable even force distribution and protect the surface of the fastening components. Suitable for use in combination with screws and threaded rods in various installation situations – especially in constructions with mounting rails and support systems.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	DIN	Weight	Quantity	Part number
US 10/125 140 HV HCP	125	0,003 kg/pcs.	100 pcs.	162346
US 10/40 140 HV HCP		0,025 kg/pcs.	100 pcs.	162373
US 12/125 140 HV HCP	125	0,006 kg/pcs.	100 pcs.	162355
US 12/40 140 HV HCP		0,024 kg/pcs.	100 pcs.	162364
US 16/125 140 HV HCP	125	0,011 kg/pcs.	100 pcs.	179156

Dimensions

Type	D	d	t
US 10/125 140 HV HCP	20 mm	10,5 mm	2 mm
US 10/40 140 HV HCP	40 mm	10,5 mm	3 mm
US 12/125 140 HV HCP	24 mm	13 mm	2,5 mm
US 12/40 140 HV HCP	40 mm	13 mm	3 mm
US 16/125 140 HV HCP	30 mm	17 mm	3 mm

Certification

