
# Safety Nut with flange NT SEC FL HCP

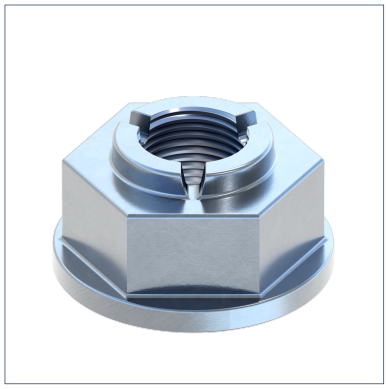

## General Information

The Safety Nut is equipped with a self-locking head made of steel (3 parts) being arranged in a conical shape. This offers the highest possible safety against unscrewing. The Safety Nut with flange offers the following advantages: Clamping effect directly at the thread – resilient, elastic; applicable for all HCP and electrogalvanised screws and threaded rods; improved thread moving due to the separated securing segments; reusability after disassembling; high temperature resistance

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | steel |
| Surface finish | HCP |
| Corrosion protection class | C4 |

## Types

| Type | Weight | Quantity | Part number |
|---|---|---|---|
| NT SEC FL M 8 HCP | 0,007 kg/pcs. | 50 pcs. | 113062 |
| NT SEC FL M10 HCP | 0,01 kg/pcs. | 50 pcs. | 113063 |

## Dimensions

| Type | D | H | Mi | SW |
|---|---|---|---|---|
| NT SEC FL M 8 HCP | 17 mm | 9,5 mm | M8 | 13 mm |
| NT SEC FL M10 HCP | 21 mm | 11,5 mm | M10 | 17 mm |

## Certification