


Bracket for vertical pipes SFK

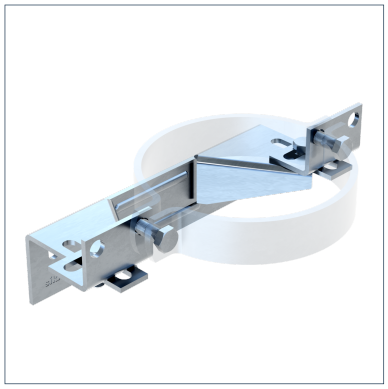

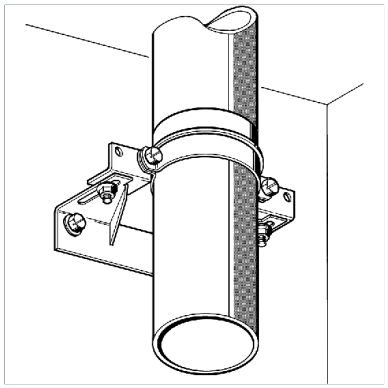

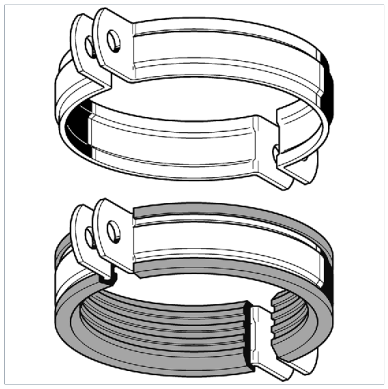

General Information

The Flange Clamp Fit SFK can be used for downpipes ranging from DN 100 to DN 150 thanks to its flexible adjustment options – one bracket for three sizes! Preferably used in combination with Pipe Clamp Stabil D-A or, if sound absorption is required, with Stabil D-A with Lining (see below). Adjustable in two horizontal directions, thus ensuring an exact and tension-free run of vertical pipes. In case SFK Brackets from pipe manufactures are used, rubber rings are added as insulation.

Installation

Distance between wall and pipe:
DN 100 (SML 110): min. 5 mm - max. 72 mm
DN 125 (SML 135): min. 5 mm - max. 53 mm
DN 150 (SML 160): min. 5 mm - max. 40 mm
The Stabil D-A pipe clamp is suitable for the bracket SFK.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Connecting element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	V{X,perm.}
SFK 100-150	2,00 kN

Types

Type	Weight	Quantity	Part number
SFK 100-150	1,251 kg/pcs.	5 pcs.	105110

Certification