
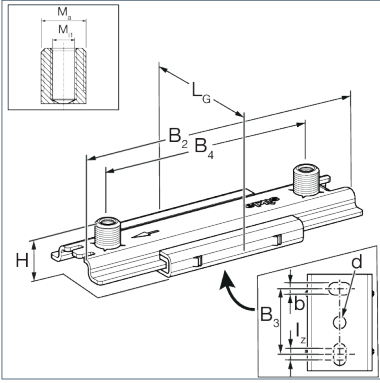
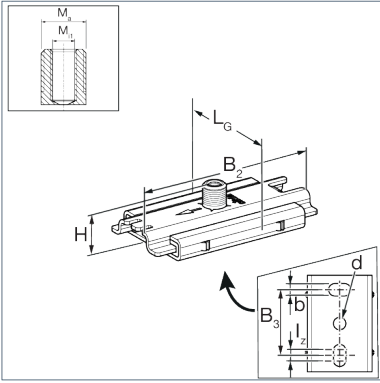
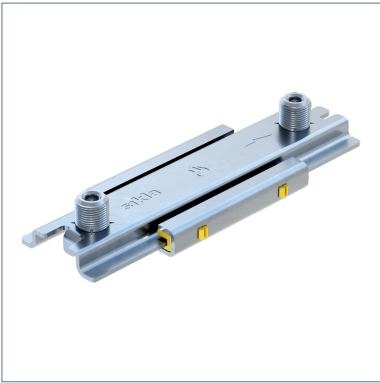


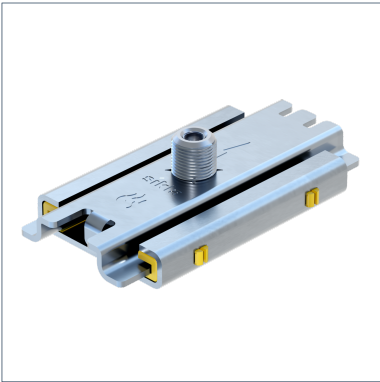

General Information

Slide Set for single and double mounting of mechanical equipment. To be used preferably in combination with Sikla Pipe Clamps Ratio S and Stabil D-3G. Various connection options with these pipe clamps ranging between M10 and R1'. For adapters for these connection options (see Adapter AD f/f). Sound absorption by means of glass fibre reinforced PA slide rails.

Temperature

Permissible long-term temperature	130 °C
-----------------------------------	--------

Mechanical Properties

Static friction μ_0	0,18
-------------------------	------

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Sliding element material	PA GF
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces


Type	-V{Z,perm.}	V{Z,perm.}
GS 2G	0,60 kN	1,20 kN
GS 2G2	0,60 kN	1,20 kN

Note on loadings

The load capacity of the connecting parts used is to be considered. This applies particularly under stress of fire.

Fire resistance

Type	Fire Resistance 30 min	Fire Resistance 60 min	Fire Resistance 90 min	Fire Resistance 120 min
GS 2G	0,6 kN	0,43 kN	0,28 kN	0,2 kN
GS 2G2	0,6 kN	0,43 kN	0,28 kN	0,2 kN

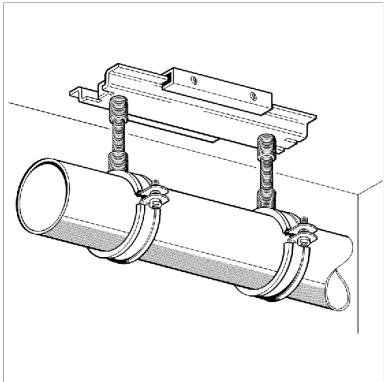

Types

Type	Max. lever arm	Max. slide path	Thread connection	Weight	Quantity	Part number
GS 2G	150,00 mm	85,00 mm	M10/M16	0,385 kg/pcs.	25 pcs.	126755
GS 2G2	150,00 mm	140,00 mm	M10/M16	0,498 kg/pcs.	25 pcs.	126764

Dimensions

Type	b	B2	B3	B4	d	H	LG	Iz	Ma	Mi1
GS 2G	13 mm	130 mm	68 mm		13 mm	35 mm	71 mm	10 mm	M16	M10
GS 2G2	13 mm	200 mm	68 mm	150 mm	13 mm	35 mm	71 mm	10 mm	M16	M10

Certification



Powered by EPD-Norway

Documents



Installation - Slide Set GS 2G