Sound Absorber SDE 0

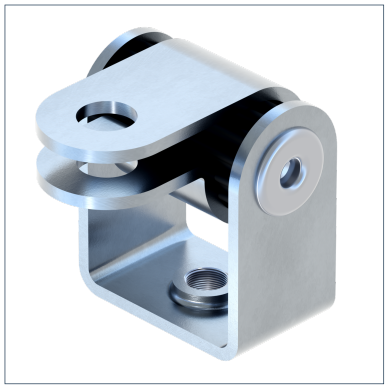

General Information

May be used for ventilation systems and other M&E services, mainly for direct ceiling attachment. Can be combined with other support components such as Ducting Angles, Pipe Clamps, Channels or special structures. May also function as an efficient band hanger when turned by 180°.

Temperature

Max. temperature	110 °C
Min. temperature	-50 °C

Mechanical Properties

Insertion isolation	15 dB(A)

Material Properties

Hardness	45+/-5° Shore
Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Isolating element material	SBR/EPDM
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
SDE 0-M 8	1,00 kN
SDE 0-M10	1,00 kN

Types

Type	Weight	Quantity	Part number
SDE 0-M 8	0,073 kg/pcs.	100 pcs.	105068
SDE 0-M10	0,074 kg/pcs.	100 pcs.	105077

Certification