
Cellular Rubber Lining MSK

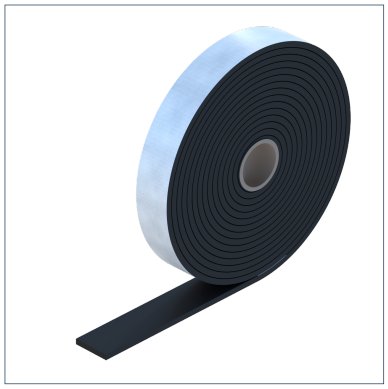

General Information

Sound absorption lining for steel straps and pipe clamps.

Temperature

Max. temperature	90 °C
Min. temperature	-40 °C

Levels of Resistance

Typically resistant	diluted acids lyes alkaline solutions water no absorption of moisture aqueous solutions up to 70 ozone-resistant weather resistant
Not resistant	hot oils fuels aliphatic and aromatic hydrocarbons chlorine gas

Mechanical Properties

Insertion isolation	12 dB(A)

Material Properties

Halogen-free	0
UV-resistant	0

Material

Isolating element material	caoutchouc
Cell structure	Closed
Corrosion protection class	C2

Types

Type	Weight	Quantity	Part number
MSK 20 X 3,0 X 10M	0,015 kg/m	150 m	137616
MSK 20 X 4,0 X 10M	0,018 kg/m	150 m	137412
MSK 20 X 6,0 X 10M	0,026 kg/m	150 m	143590
MSK 25 X 3,0 X 10M	0,018 kg/m	120 m	137722
MSK 30 X 3,0 X 10M	0,022 kg/m	100 m	137607

Certification

epd-global
Powered by EPD-Norway