
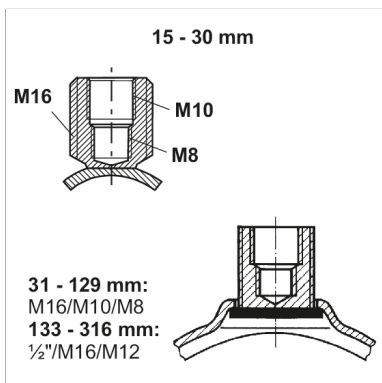
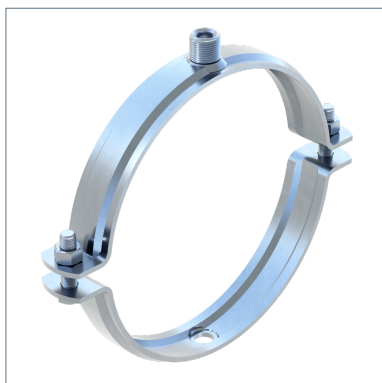


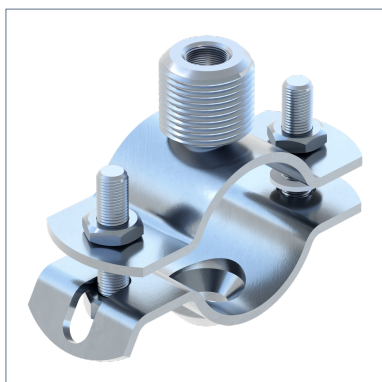

General Information

For the installation of pipes required for all M&E services in industrial, residential and public buildings.

Installation

For FM applications, at least M10 must be used.

For VdS applications > 2" to 4", at least M10 must be used.

Tightening torques:

Size range [mm]	Tightening torque [Nm]
15 - 72	2
76 - 129	3
133 - 173	5
176 - 316	10

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Connecting element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
STABIL D-3G 15- 19	2,00 kN
STABIL D-3G 20- 24	2,00 kN
STABIL D-3G 25 - 30	2,00 kN
STABIL D-3G 31- 35	5,00 kN
STABIL D-3G 40- 45	5,00 kN
STABIL D-3G 48- 53	5,00 kN
STABIL D-3G 54- 59	5,00 kN
STABIL D-3G 60- 65	5,00 kN
STABIL D-3G 67- 72	5,00 kN
STABIL D-3G/M 76- 81	5,00 kN

Type	-V{Z,perm.}
STABIL D-3G/M 82- 87	5,00 kN
STABIL D-3G/M 88- 93	5,00 kN
STABIL D-3G/M 102- 108	5,00 kN
STABIL D-3G/M 110- 116	5,00 kN
STABIL D-3G/M 124- 129	5,00 kN
STABIL D-3G 133-140	8,00 kN
STABIL D-3G 140-148	8,00 kN
STABIL D-3G 149-155	8,00 kN
STABIL D-3G 159-165	8,00 kN
STABIL D-3G 167-173	8,00 kN
STABIL D-3G 176-184	12,50 kN
STABIL D-3G 188-194	12,50 kN
STABIL D-3G 199-205	12,50 kN
STABIL D-3G 207-216	12,50 kN
STABIL D-3G 219-225	12,50 kN
STABIL D-3G 244-250	12,50 kN
STABIL D-3G 267-273	12,50 kN
STABIL D-3G 278-284	12,50 kN
STABIL D-3G 297-303	12,50 kN
STABIL D-3G 310-316	12,50 kN

Types

Type	Size min.	Size max.	DN	Thread connection	Weight	Quantity	Part number
STABIL D-3G 15-19	15,00 mm	19,00 mm	DN 10 (3/8")	M8/M10/M16	0,073 kg/ pcs.	50 pcs.	107705
STABIL D-3G 20-24	20,00 mm	24,00 mm	DN 15 (1/2")	M8/M10/M16	0,078 kg/ pcs.	50 pcs.	107714
STABIL D-3G 25 - 30	25,00 mm	30,00 mm	DN 20 (3/4")	M8/M10/M16	0,083 kg/ pcs.	50 pcs.	107723
STABIL D-3G 31-35	31,00 mm	35,00 mm	DN 25 (1")	M8/M10/M16	0,121 kg/ pcs.	50 pcs.	107015
STABIL D-3G 40-45	40,00 mm	45,00 mm	DN 32 (1 1/4")	M8/M10/M16	0,137 kg/ pcs.	50 pcs.	107024
STABIL D-3G 48-53	48,00 mm	53,00 mm	DN 40 (1 1/2")	M8/M10/M16	0,151 kg/ pcs.	50 pcs.	107033
STABIL D-3G 54-59	54,00 mm	59,00 mm		M8/M10/M16	0,164 kg/ pcs.	50 pcs.	107042

Type	Size min.	Size max.	DN	Thread connection	Weight	Quantity	Part number
STABIL D-3G 60-65	60,00 mm	65,00 mm	DN 50 (2")	M8/M10/M16	0,178 kg/pcs.	50 pcs.	107051
STABIL D-3G 67-72	67,00 mm	72,00 mm		M8/M10/M16	0,185 kg/pcs.	50 pcs.	107060
STABIL D-3G/M 76-81	76,00 mm	81,00 mm	DN 65 (2 1/2")	M8/M10/M16	0,288 kg/pcs.	25 pcs.	115759
STABIL D-3G/M 82-87	82,00 mm	87,00 mm		M8/M10/M16	0,304 kg/pcs.	25 pcs.	115761
STABIL D-3G/M 88-93	88,00 mm	93,00 mm	DN 80 (3")	M8/M10/M16	0,317 kg/pcs.	25 pcs.	115762
STABIL D-3G/M 102-108	102,00 mm	108,00 mm		M8/M10/M16	0,331 kg/pcs.	25 pcs.	115763
STABIL D-3G/M 110-116	110,00 mm	116,00 mm	DN 100 (4")	M8/M10/M16	0,36 kg/pcs.	25 pcs.	115764
STABIL D-3G/M 124-129	124,00 mm	129,00 mm		M8/M10/M16	0,378 kg/pcs.	25 pcs.	115766
STABIL D-3G 133-140	133,00 mm	140,00 mm		M12/M16/1/2"	0,781 kg/pcs.	10 pcs.	107130
STABIL D-3G 140-148	140,00 mm	148,00 mm	DN 125 (5")	M12/M16/1/2"	0,8 kg/pcs.	10 pcs.	115885
STABIL D-3G 149-155	149,00 mm	155,00 mm		M12/M16/1/2"	0,84 kg/pcs.	10 pcs.	107149
STABIL D-3G 159-165	159,00 mm	165,00 mm		M12/M16/1/2"	0,843 kg/pcs.	10 pcs.	107158
STABIL D-3G 167-173	167,00 mm	173,00 mm	DN 150 (6")	M12/M16/1/2"	0,926 kg/pcs.	10 pcs.	107167
STABIL D-3G 176-184	176,00 mm	184,00 mm		M12/M16/1/2"	1,015 kg/pcs.	10 pcs.	107176
STABIL D-3G 188-194	188,00 mm	194,00 mm		M12/M16/1/2"	1,03 kg/pcs.	10 pcs.	107185
STABIL D-3G 199-205	199,00 mm	205,00 mm		M12/M16/1/2"	1,071 kg/pcs.	10 pcs.	107194
STABIL D-3G 207-216	207,00 mm	216,00 mm		M12/M16/1/2"	1,146 kg/pcs.	10 pcs.	148939
STABIL D-3G 219-225	219,00 mm	225,00 mm	DN 200 (8")	M12/M16/1/2"	1,165 kg/pcs.	10 pcs.	107200
STABIL D-3G 244-250	244,00 mm	250,00 mm		M12/M16/1/2"	1,282 kg/pcs.	10 pcs.	107219
STABIL D-3G 267-273	267,00 mm	273,00 mm	DN 250 (10")	M12/M16/1/2"	1,343 kg/pcs.	10 pcs.	107228
STABIL D-3G 278-284	278,00 mm	284,00 mm		M12/M16/1/2"	1,429 kg/pcs.	10 pcs.	107237

Type	Size min.	Size max.	DN	Thread connection	Weight	Quantity	Part number
STABIL D-3G 297-303	297,00 mm	303,00 mm		M12/M16/1/2"	1,5 kg/pcs.	10 pcs.	107246
STABIL D-3G 310-316	310,00 mm	316,00 mm		M12/M16/1/2"	1,538 kg/pcs.	10 pcs.	147600

Dimensions

Type	B1	b1	D	D1	e	H	H3	Ma	Mi1	Mi2	SA	SG	SL	t
STABIL D-3G 15-19	57 mm	25 mm	19 mm	19 mm	35,5 mm	44,1 mm	17 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2 mm
STABIL D-3G 20-24	63 mm	25 mm	24 mm	24 mm	41 mm	49,1 mm	17 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2 mm
STABIL D-3G 25-30	69 mm	25 mm	30 mm	30 mm	48 mm	55,1 mm	17 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2 mm
STABIL D-3G 31-35	74 mm	30 mm	35 mm	35 mm	52,5 mm	62 mm	21 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2,5 mm
STABIL D-3G 40-45	85 mm	30 mm	45 mm	45 mm	64 mm	72 mm	21 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2,5 mm
STABIL D-3G 48-53	94 mm	30 mm	53 mm	53 mm	72,5 mm	80 mm	21 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2,5 mm
STABIL D-3G 54-59	104 mm	30 mm	59 mm	59 mm	83 mm	86 mm	21 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2,5 mm
STABIL D-3G 60-65	111 mm	30 mm	65 mm	65 mm	90 mm	92 mm	21 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2,5 mm
STABIL D-3G 67-72	117 mm	30 mm	72 mm	72 mm	96 mm	99 mm	21 mm	M16	M8	M10	slot with Philips, Form H	M6	22 mm	2,5 mm
STABIL D-3G/M 76-81	144 mm	30 mm	81 mm	81 mm	115 mm	108,5 mm	21 mm	M16	M8	M10	AF13	M8	30 mm	3 mm
STABIL D-3G/M 82-87	150 mm	30 mm	87 mm	87 mm	121 mm	114,5 mm	21 mm	M16	M8	M10	AF13	M8	30 mm	3 mm
STABIL D-3G/M 88-93	156 mm	30 mm	93 mm	93 mm	127 mm	120,5 mm	21 mm	M16	M8	M10	AF13	M8	30 mm	3 mm
STABIL D-3G/M 102-108	170 mm	30 mm	108 mm	108 mm	141 mm	135,5 mm	21 mm	M16	M8	M10	AF13	M8	30 mm	3 mm

Type	B1	b1	D	D1	e	H	H3	Ma	Mi1	Mi2	SA	SG	SL	t
STABIL D-3G/M 110- 116	178 mm	30 mm	116 mm	116 mm	149 mm	143,5 mm	21 mm	M16	M8	M10	AF13	M8	30 mm	3 mm
STABIL D-3G/M 124- 129	191 mm	30 mm	129 mm	129 mm	162 mm	156,5 mm	21 mm	M16	M8	M10	AF13	M8	30 mm	3 mm
STABIL D-3G 133-140	210 mm	40 mm	140 mm	140 mm	181 mm	175 mm	27 mm	1/2"	M12	M16	AF17	M10	40 mm	4 mm
STABIL D-3G 140-148	218 mm	40 mm	148 mm	148 mm	189 mm	183 mm	27 mm	1/2"	M12	M16	AF17	M10	40 mm	4 mm
STABIL D-3G 149-155	225 mm	40 mm	155 mm	155 mm	196 mm	190 mm	27 mm	1/2"	M12	M16	AF17	M10	40 mm	4 mm
STABIL D-3G 159-165	235 mm	40 mm	165 mm	165 mm	206 mm	200 mm	27 mm	1/2"	M12	M16	AF17	M10	40 mm	4 mm
STABIL D-3G 167-173	243 mm	40 mm	173 mm	173 mm	214 mm	208 mm	27 mm	1/2"	M12	M16	AF17	M10	40 mm	4 mm
STABIL D-3G 176-184	255 mm	40 mm	184 mm	184 mm	226 mm	219 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 188-194	265 mm	40 mm	194 mm	194 mm	236 mm	229 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 199-205	276 mm	40 mm	205 mm	205 mm	247 mm	240 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 207-216	287 mm	40 mm	216 mm	216 mm	258 mm	251 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 219-225	296 mm	40 mm	225 mm	225 mm	267 mm	260 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 244-250	321 mm	40 mm	250 mm	250 mm	292 mm	285 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 267-273	344 mm	40 mm	273 mm	273 mm	315 mm	308 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 278-284	355 mm	40 mm	284 mm	284 mm	326 mm	319 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm
STABIL D-3G 297-303	374 mm	40 mm	303 mm	303 mm	345 mm	338 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm

Type	B1	b1	D	D1	e	H	H3	Ma	Mi1	Mi2	SA	SG	SL	t
STABIL D-3G 310-316	387 mm	40 mm	316 mm	316 mm	358 mm	351 mm	27 mm	1/2"	M12	M16	AF19	M12	45 mm	4 mm

Certification



VdS-Approval No. G4920027 up to 8"
FM Approval for sizes 31 - 173 (another pipe clamp with FM Approval is: Stabil D-M16)

Documents



VdS Approval - Sikla Stabil D-3G wo/
lining - G4920027