


Duo Clamp SRS ME A4

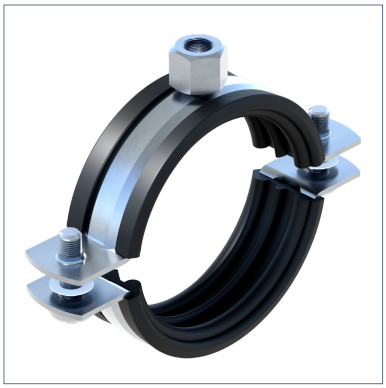

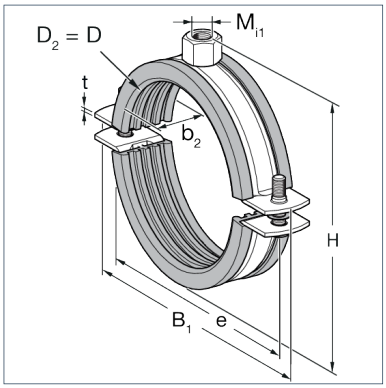

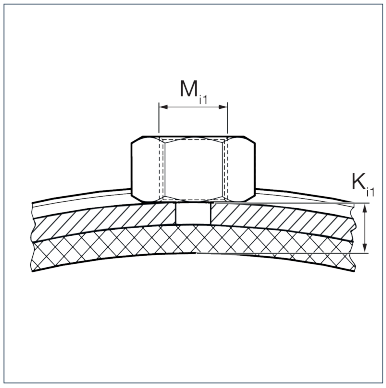

General Information

Two-piece pipe clamp with thread connection M8 or M10 and sound absorption lining for the installation of pipelines.

Installation

Tightening torque: 2 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	Stainless Steel A4
Isolating element material	SBR/EPDM
Connecting element material	Stainless Steel A4
Corrosion protection class	CRC II – III (C4 – C5 acc. to DIN EN ISO 12944-2)

Forces

Type	-V{Z,perm.}
SRS ME 12- 15 A4	0,60 kN
SRS ME 15- 19 A4	0,60 kN
SRS ME 20- 23 A4	0,60 kN
SRS ME 25- 28 A4	0,60 kN
SRS ME 32- 35 A4	0,60 kN
SRS ME 40- 45 A4	0,60 kN
SRS ME 48- 52 A4	0,60 kN
SRS ME 52- 58 A4	0,60 kN
SRS ME 60- 64 A4	0,60 kN
SRS ME 67- 72 A4	2,50 kN
SRS ME 73- 80 A4	2,50 kN
SRS ME 86- 91 A4	2,50 kN
SRS ME 102-108 A4	2,50 kN
SRS ME 110-115 A4	2,50 kN
SRS ME 135-143 A4	2,50 kN
SRS ME 149-161 A4	2,50 kN
SRS ME 162-170 A4	2,50 kN

Duo Clamp SRS ME A4

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
SRS ME 12- 15 A4	12,00 mm	15,00 mm	DN 8 (1/4")	0,051 kg/pcs.	100 pcs.	170693
SRS ME 15- 19 A4	15,00 mm	19,00 mm	DN 10 (3/8")	0,058 kg/pcs.	100 pcs.	170709
SRS ME 20- 23 A4	20,00 mm	23,00 mm	DN 15 (1/2")	0,059 kg/pcs.	100 pcs.	170718
SRS ME 25- 28 A4	25,00 mm	28,00 mm	DN 20 (3/4")	0,066 kg/pcs.	100 pcs.	170727
SRS ME 32- 35 A4	32,00 mm	35,00 mm	DN 25 (1")	0,076 kg/pcs.	100 pcs.	170736
SRS ME 40- 45 A4	40,00 mm	45,00 mm	DN 32 (1 1/4")	0,087 kg/pcs.	50 pcs.	170745
SRS ME 48- 52 A4	48,00 mm	52,00 mm	DN 40 (1 1/2")	0,094 kg/pcs.	50 pcs.	170754
SRS ME 52- 58 A4	52,00 mm	58,00 mm		0,104 kg/pcs.	50 pcs.	173360
SRS ME 60- 64 A4	60,00 mm	64,00 mm	DN 50 (2")	0,109 kg/pcs.	50 pcs.	170763
SRS ME 67- 72 A4	67,00 mm	72,00 mm		0,198 kg/pcs.	25 pcs.	173369
SRS ME 73- 80 A4	73,00 mm	80,00 mm	DN 65 (2 1/2")	0,210 kg/pcs.	25 pcs.	170772
SRS ME 86- 91 A4	86,00 mm	91,00 mm	DN 80 (3")	0,231 kg/pcs.	25 pcs.	170781
SRS ME 102-108 A4	102,00 mm	108,00 mm		0,259 kg/pcs.	25 pcs.	173378
SRS ME 110-115 A4	110,00 mm	115,00 mm	DN 100 (4")	0,310 kg/pcs.	25 pcs.	170790
SRS ME 135-143 A4	135,00 mm	143,00 mm	DN 125 (5")	0,376 kg/pcs.	25 pcs.	110884
SRS ME 149-161 A4	149,00 mm	161,00 mm		0,401 kg/pcs.	25 pcs.	110885
SRS ME 162-170 A4	162,00 mm	170,00 mm	DN 150 (6")	0,434 kg/pcs.	25 pcs.	110886

Dimensions

Type	B1	b2	D	D2	e	H	Mi1	t	Ki1
SRS ME 12- 15 A4	54,5 mm	23,5 mm	14 mm	14 mm	39,5 mm	40 mm	M8	1,5 mm	11,29 mm
SRS ME 15- 19 A4	58,5 mm	23,5 mm	18 mm	18 mm	43,5 mm	44 mm	M8	1,5 mm	11,29 mm
SRS ME 20- 23 A4	62,5 mm	23,5 mm	22 mm	22 mm	47,5 mm	48 mm	M8	1,5 mm	11,29 mm
SRS ME 25- 28 A4	68,5 mm	23,5 mm	28 mm	28 mm	53,5 mm	54 mm	M8	1,5 mm	11,29 mm
SRS ME 32- 35 A4	76 mm	23,5 mm	36 mm	36 mm	61 mm	62 mm	M8	1,5 mm	11,29 mm
SRS ME 40- 45 A4	91,5 mm	23,5 mm	44 mm	44 mm	74,5 mm	70 mm	M8	1,5 mm	11,29 mm
SRS ME 48- 52 A4	99 mm	23,5 mm	52 mm	52 mm	82 mm	78 mm	M8	1,5 mm	11,29 mm
SRS ME 52- 58 A4	105 mm	23,5 mm	58 mm	58 mm	88 mm	84 mm	M8	1,5 mm	11,29 mm
SRS ME 60- 64 A4	112 mm	23,5 mm	64 mm	64 mm	95 mm	90 mm	M8	1,5 mm	11,29 mm

Duo Clamp SRS ME A4

Type	B1	b2	D	D2	e	H	Mi1	t	Ki1
SRS ME 67- 72 A4	125 mm	28 mm	70 mm	70 mm	105 mm	102 mm	M10	2 mm	14,22 mm
SRS ME 73- 80 A4	134 mm	28 mm	78 mm	78 mm	114 mm	110 mm	M10	2 mm	14,22 mm
SRS ME 86- 91 A4	146,5 mm	28 mm	89 mm	89 mm	126,5 mm	121 mm	M10	2 mm	14,22 mm
SRS ME 102-108 A4	159,5 mm	28 mm	105 mm	105 mm	139,5 mm	137 mm	M10	2 mm	14,22 mm
SRS ME 110-115 A4	173 mm	28 mm	114 mm	114 mm	153 mm	148 mm	M10	2,5 mm	15,22 mm
SRS ME 135-143 A4	203 mm	28 mm	143 mm	143 mm	183 mm	177 mm	M10	2,5 mm	15,22 mm
SRS ME 149-161 A4	215 mm	28 mm	156 mm	156 mm	195 mm	190 mm	M10	2,5 mm	15,22 mm
SRS ME 162-170 A4	229 mm	28 mm	168 mm	168 mm	209 mm	202 mm	M10	2,5 mm	15,22 mm

Certification

EDELSTAHL Rostfrei®

epd-global
Powered by EPD-Norway