
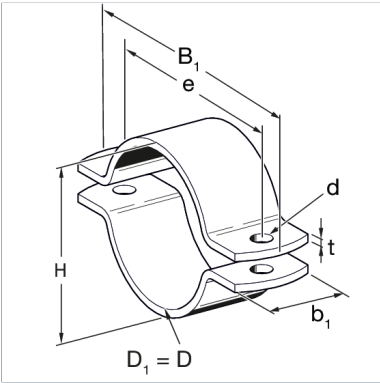
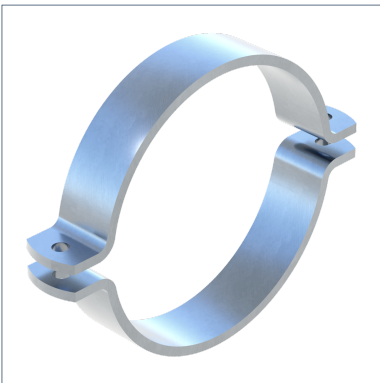


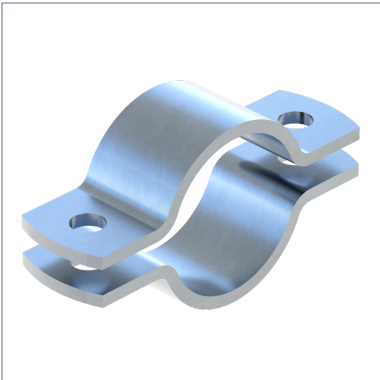

General Information

For particularly high static requirements in plant construction. Design similar to DIN 3567. The perforations on both sides allow the application of standardised bolts and threaded rods out of the Sikla product range. If fixed on both sides by threaded rods M12 or M16 or threaded tubes, we recommend the application of the Support Cone SMD 1. In addition to be applied for the design of Fixed Points or Sliding Supports by welding to T-Sections.

Installation

Tightening torque and recommended clamping bolts:

Size range [mm]	Recommended clamping bolts	Tightening torque [Nm]
14 - 49	M10 x 40	20
57 - 109	M12 x 45	40
109 - 163	M12 x 50	40
163 - 273	M12 x 55	40
317 - 374	M16 x 60	100
397 - 610	M16 x 65	100

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	uncoated

Forces

Type	-V{Z,perm.}
STABIL RB-A 14- 18 BL	11,00 kN
STABIL RB-A 18- 22 BL	11,00 kN
STABIL RB-A 23- 27 BL	11,00 kN
STABIL RB-A 26- 30 BL	11,00 kN
STABIL RB-A 30- 34 BL	11,00 kN
STABIL RB-A 35- 39 BL	11,00 kN
STABIL RB-A 40- 44 BL	11,00 kN
STABIL RB-A 45- 49 BL	11,00 kN
STABIL RB-A 50- 54 BL	11,00 kN

Type	-V{Z,perm.}
STABIL RB-A 55- 59 BL	11,00 kN
STABIL RB-A 57- 61 BL	15,50 kN
STABIL RB-A 62- 66 BL	15,50 kN
STABIL RB-A 67- 71 BL	15,50 kN
STABIL RB-A 72- 77 BL	15,50 kN
STABIL RB-A 78- 83 BL	15,50 kN
STABIL RB-A 84- 89 BL	15,50 kN
STABIL RB-A 89- 95 BL	15,50 kN
STABIL RB-A 96- 102 BL	22,00 kN
STABIL RB-A 102- 109 BL	22,00 kN
STABIL RB-A 109- 115 BL	22,00 kN
STABIL RB-A 115- 122 BL	22,00 kN
STABIL RB-A 122- 128 BL	22,00 kN
STABIL RB-A 128- 134 BL	22,00 kN
STABIL RB-A 134- 140 BL	22,00 kN
STABIL RB-A 140- 146 BL	22,00 kN
STABIL RB-A 146- 152 BL	22,00 kN
STABIL RB-A 152- 158 BL	22,00 kN
STABIL RB-A 157- 163 BL	22,00 kN
STABIL RB-A 163- 169 BL	22,00 kN
STABIL RB-A 168- 174 BL	42,00 kN
STABIL RB-A 174- 180 BL	42,00 kN
STABIL RB-A 181- 187 BL	42,00 kN
STABIL RB-A 188- 194 BL	42,00 kN
STABIL RB-A 194- 200 BL	42,00 kN
STABIL RB-A 201- 207 BL	42,00 kN
STABIL RB-A 208- 214 BL	42,00 kN
STABIL RB-A 215- 221 BL	42,00 kN
STABIL RB-A 222- 229 BL	42,00 kN
STABIL RB-A 230- 237 BL	42,00 kN
STABIL RB-A 238- 245 BL	42,00 kN
STABIL RB-A 246- 254 BL	42,00 kN
STABIL RB-A 255- 262 BL	42,00 kN
STABIL RB-A 259- 266 BL	42,00 kN
STABIL RB-A 266- 273 BL	42,00 kN

Type	-V{Z,perm.}
STABIL RB-A 274- 282 BL	42,00 kN
STABIL RB-A 283- 291 BL	42,00 kN
STABIL RB-A 292- 300 BL	42,00 kN
STABIL RB-A 301- 309 BL	42,00 kN
STABIL RB-A 310- 317 BL	42,00 kN
STABIL RB-A 317- 324 BL	42,00 kN
STABIL RB-A 325- 333 BL	42,00 kN
STABIL RB-A 334- 342 BL	42,00 kN
STABIL RB-A 343- 350 BL	42,00 kN
STABIL RB-A 349- 356 BL	42,00 kN
STABIL RB-A 358- 365 BL	42,00 kN
STABIL RB-A 366- 374 BL	42,00 kN
STABIL RB-A 375- 382 BL	42,00 kN
STABIL RB-A 381- 388 BL	42,00 kN
STABIL RB-A 389- 396 BL	42,00 kN
STABIL RB-A 397- 407 BL	42,00 kN
STABIL RB-A 408- 418 BL	42,00 kN
STABIL RB-A 419- 429 BL	42,00 kN
STABIL RB-A 430- 440 BL	42,00 kN
STABIL RB-A 441- 451 BL	42,00 kN
STABIL RB-A 447- 457 BL	42,00 kN
STABIL RB-A 458- 468 BL	42,00 kN
STABIL RB-A 467- 477 BL	42,00 kN
STABIL RB-A 477- 487 BL	42,00 kN
STABIL RB-A 488- 498 BL	42,00 kN
STABIL RB-A 498- 508 BL	42,00 kN
STABIL RB-A 509- 519 BL	42,00 kN
STABIL RB-A 520- 530 BL	42,00 kN
STABIL RB-A 531- 541 BL	42,00 kN
STABIL RB-A 542- 552 BL	42,00 kN
STABIL RB-A 553- 563 BL	42,00 kN
STABIL RB-A 564- 574 BL	42,00 kN
STABIL RB-A 575- 585 BL	42,00 kN
STABIL RB-A 586- 596 BL	42,00 kN
STABIL RB-A 594- 604 BL	42,00 kN

Type	-V{Z,perm.}
STABIL RB-A 600- 610 BL	42,00 kN

Note on loadings

Admissible load valid with fixation on both sides.

The max. permissible load capacity of the connected parts (e.g. anchors) shall be considered.

The max. adm. load capacity is determined by the application of statistical methods resulting from the breaking loads, under observance of a max. adm. deformation of 1.5 mm resp. 2% of the max. stretchable pipe dia.

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
STABIL RB-A 14- 18 BL	14,00 mm	18,00 mm	DN 8 (1/4")	0,17 kg/pcs.	25 pcs.	110309
STABIL RB-A 18- 22 BL	18,00 mm	22,00 mm	DN 15 (1/2")	0,18 kg/pcs.	25 pcs.	110310
STABIL RB-A 23- 27 BL	23,00 mm	27,00 mm	DN 20 (3/4")	0,19 kg/pcs.	25 pcs.	110312
STABIL RB-A 26- 30 BL	26,00 mm	30,00 mm		0,224 kg/pcs.	25 pcs.	804206
STABIL RB-A 30- 34 BL	30,00 mm	34,00 mm	DN 25 (1")	0,238 kg/pcs.	25 pcs.	110403
STABIL RB-A 35- 39 BL	35,00 mm	39,00 mm	DN 25 (1")	0,24 kg/pcs.	25 pcs.	110314
STABIL RB-A 40- 44 BL	40,00 mm	44,00 mm	DN 32 (1 1/4")	0,273 kg/pcs.	25 pcs.	110404
STABIL RB-A 45- 49 BL	45,00 mm	49,00 mm	DN 40 (1 1/2")	0,28 kg/pcs.	25 pcs.	110316
STABIL RB-A 50- 54 BL	50,00 mm	54,00 mm		0,318 kg/pcs.	25 pcs.	804207
STABIL RB-A 55- 59 BL	55,00 mm	59,00 mm		0,336 kg/pcs.	25 pcs.	804208
STABIL RB-A 57- 61 BL	57,00 mm	61,00 mm	DN 50 (2")	0,452 kg/pcs.	25 pcs.	110319
STABIL RB-A 62- 66 BL	62,00 mm	66,00 mm		0,488 kg/pcs.	25 pcs.	804209
STABIL RB-A 67- 71 BL	67,00 mm	71,00 mm		0,46 kg/pcs.	25 pcs.	110320
STABIL RB-A 72- 77 BL	72,00 mm	77,00 mm	DN 65 (2 1/2")	0,528 kg/pcs.	25 pcs.	110321
STABIL RB-A 78- 83 BL	78,00 mm	83,00 mm		0,568 kg/pcs.	25 pcs.	804210
STABIL RB-A 84- 89 BL	84,00 mm	89,00 mm	DN 80 (3")	0,586 kg/pcs.	25 pcs.	110322
STABIL RB-A 89- 95 BL	89,00 mm	95,00 mm		0,78 kg/pcs.	10 pcs.	801951
STABIL RB-A 96- 102 BL	96,00 mm	102,00 mm	DN 90 (3 1/2")	0,76 kg/pcs.	10 pcs.	110323

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
STABIL RB-A 102- 109 BL	102,00 mm	109,00 mm	DN 100 (4")	0,83 kg/pcs.	10 pcs.	110324
STABIL RB-A 109- 115 BL	109,00 mm	115,00 mm	DN 100 (4")	0,901 kg/pcs.	10 pcs.	110325
STABIL RB-A 115- 122 BL	115,00 mm	122,00 mm		0,94 kg/pcs.	10 pcs.	801952
STABIL RB-A 122- 128 BL	122,00 mm	128,00 mm		0,98 kg/pcs.	10 pcs.	801953
STABIL RB-A 128- 134 BL	128,00 mm	134,00 mm	DN 125 (5")	0,93 kg/pcs.	10 pcs.	110327
STABIL RB-A 134- 140 BL	134,00 mm	140,00 mm	DN 125 (5")	1,013 kg/pcs.	10 pcs.	110328
STABIL RB-A 140- 146 BL	140,00 mm	146,00 mm		1,088 kg/pcs.	10 pcs.	804211
STABIL RB-A 146- 152 BL	146,00 mm	152,00 mm		1,128 kg/pcs.	10 pcs.	804212
STABIL RB-A 152- 158 BL	152,00 mm	158,00 mm		1,166 kg/pcs.	10 pcs.	804213
STABIL RB-A 157- 163 BL	157,00 mm	163,00 mm	DN 150 (6")	1,168 kg/pcs.	10 pcs.	111733
STABIL RB-A 163- 169 BL	163,00 mm	169,00 mm	DN 150 (6")	1,926 kg/pcs.	10 pcs.	110330
STABIL RB-A 168- 174 BL	168,00 mm	174,00 mm		2,052 kg/pcs.	1 pcs.	804214
STABIL RB-A 174- 180 BL	174,00 mm	180,00 mm		2,11 kg/pcs.	1 pcs.	804215
STABIL RB-A 181- 187 BL	181,00 mm	187,00 mm		2,178 kg/pcs.	1 pcs.	804216
STABIL RB-A 188- 194 BL	188,00 mm	194,00 mm	DN 175 (7")	2,16 kg/pcs.	1 pcs.	110332
STABIL RB-A 194- 200 BL	194,00 mm	200,00 mm		2,312 kg/pcs.	1 pcs.	804217
STABIL RB-A 201- 207 BL	201,00 mm	207,00 mm		2,38 kg/pcs.	1 pcs.	804218
STABIL RB-A 208- 214 BL	208,00 mm	214,00 mm		2,448 kg/pcs.	1 pcs.	804219
STABIL RB-A 215- 221 BL	215,00 mm	221,00 mm	DN 200 (8")	2,41 kg/pcs.	1 pcs.	110335
STABIL RB-A 222- 229 BL	222,00 mm	229,00 mm		2,584 kg/pcs.	1 pcs.	804220
STABIL RB-A 230- 237 BL	230,00 mm	237,00 mm		2,662 kg/pcs.	1 pcs.	804221

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
STABIL RB-A 238- 245 BL	238,00 mm	245,00 mm		2,74 kg/pcs.	1 pcs.	804222
STABIL RB-A 246- 254 BL	246,00 mm	254,00 mm		2,8 kg/pcs.	1 pcs.	110336
STABIL RB-A 255- 262 BL	255,00 mm	262,00 mm		2,91 kg/pcs.	1 pcs.	801954
STABIL RB-A 259- 266 BL	259,00 mm	266,00 mm	DN 250 (10")	2,92 kg/pcs.	1 pcs.	110337
STABIL RB-A 266- 273 BL	266,00 mm	273,00 mm	DN 250 (10")	3,02 kg/pcs.	1 pcs.	110338
STABIL RB-A 274- 282 BL	274,00 mm	282,00 mm		3,79 kg/pcs.	1 pcs.	804223
STABIL RB-A 283- 291 BL	283,00 mm	291,00 mm		3,896 kg/pcs.	1 pcs.	804224
STABIL RB-A 292- 300 BL	292,00 mm	300,00 mm		4,002 kg/pcs.	1 pcs.	804225
STABIL RB-A 301- 309 BL	301,00 mm	309,00 mm		4,108 kg/pcs.	1 pcs.	804226
STABIL RB-A 310- 317 BL	310,00 mm	317,00 mm		4,202 kg/pcs.	1 pcs.	804227
STABIL RB-A 317- 324 BL	317,00 mm	324,00 mm	DN 300 (12")	4,11 kg/pcs.	1 pcs.	110341
STABIL RB-A 325- 333 BL	325,00 mm	333,00 mm		4,398 kg/pcs.	1 pcs.	804228
STABIL RB-A 334- 342 BL	334,00 mm	342,00 mm		4,504 kg/pcs.	1 pcs.	804229
STABIL RB-A 343- 350 BL	343,00 mm	350,00 mm		4,598 kg/pcs.	1 pcs.	804230
STABIL RB-A 349- 356 BL	349,00 mm	356,00 mm	DN 350 (14")	4,53 kg/pcs.	1 pcs.	110342
STABIL RB-A 358- 365 BL	358,00 mm	365,00 mm		4,78 kg/pcs.	1 pcs.	801955
STABIL RB-A 366- 374 BL	366,00 mm	374,00 mm	DN 350 (14")	4,84 kg/pcs.	1 pcs.	110343
STABIL RB-A 375- 382 BL	375,00 mm	382,00 mm		4,976 kg/pcs.	1 pcs.	804231
STABIL RB-A 381- 388 BL	381,00 mm	388,00 mm		5,046 kg/pcs.	1 pcs.	804232
STABIL RB-A 389- 396 BL	389,00 mm	396,00 mm		5,14 kg/pcs.	1 pcs.	804233
STABIL RB-A 397- 407 BL	397,00 mm	407,00 mm	DN 400 (16")	6,15 kg/pcs.	1 pcs.	110344

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
STABIL RB-A 408- 418 BL	408,00 mm	418,00 mm		6,26 kg/pcs.	1 pcs.	801956
STABIL RB-A 419- 429 BL	419,00 mm	429,00 mm	DN 400 (16")	6,3 kg/pcs.	1 pcs.	110345
STABIL RB-A 430- 440 BL	430,00 mm	440,00 mm		6,56 kg/pcs.	1 pcs.	804234
STABIL RB-A 441- 451 BL	441,00 mm	451,00 mm		6,712 kg/pcs.	1 pcs.	804235
STABIL RB-A 447- 457 BL	447,00 mm	457,00 mm	DN 450 (18")	6,85 kg/pcs.	1 pcs.	110346
STABIL RB-A 458- 468 BL	458,00 mm	468,00 mm		6,946 kg/pcs.	1 pcs.	804236
STABIL RB-A 467- 477 BL	467,00 mm	477,00 mm		7,07 kg/pcs.	1 pcs.	804237
STABIL RB-A 477- 487 BL	477,00 mm	487,00 mm		7,208 kg/pcs.	1 pcs.	804238
STABIL RB-A 488- 498 BL	488,00 mm	498,00 mm		7,358 kg/pcs.	1 pcs.	804239
STABIL RB-A 498- 508 BL	498,00 mm	508,00 mm	DN 500 (20")	7,66 kg/pcs.	1 pcs.	110347
STABIL RB-A 509- 519 BL	509,00 mm	519,00 mm		7,65 kg/pcs.	1 pcs.	801957
STABIL RB-A 520- 530 BL	520,00 mm	530,00 mm	DN 500 (20")	7,85 kg/pcs.	1 pcs.	110348
STABIL RB-A 531- 541 BL	531,00 mm	541,00 mm		7,91 kg/pcs.	1 pcs.	110442
STABIL RB-A 542- 552 BL	542,00 mm	552,00 mm		8,112 kg/pcs.	1 pcs.	804240
STABIL RB-A 553- 563 BL	553,00 mm	563,00 mm		8,264 kg/pcs.	1 pcs.	804241
STABIL RB-A 564- 574 BL	564,00 mm	574,00 mm		8,416 kg/pcs.	1 pcs.	804242
STABIL RB-A 575- 585 BL	575,00 mm	585,00 mm		8,568 kg/pcs.	1 pcs.	804243
STABIL RB-A 586- 596 BL	586,00 mm	596,00 mm		8,72 kg/pcs.	1 pcs.	804244
STABIL RB-A 594- 604 BL	594,00 mm	604,00 mm		8,83 kg/pcs.	1 pcs.	804245
STABIL RB-A 600- 610 BL	600,00 mm	610,00 mm	DN 600 (24")	8,942 kg/pcs.	1 pcs.	110443

Dimensions

Type	B1	b1	D	D1	d	e	H	t
STABIL RB-A 14- 18 BL	80 mm	30 mm	18 mm	18 mm	11 mm	52 mm	28 mm	5 mm
STABIL RB-A 18- 22 BL	86 mm	30 mm	22 mm	22 mm	11 mm	58 mm	32 mm	5 mm
STABIL RB-A 23- 27 BL	93 mm	30 mm	27 mm	27 mm	11 mm	65 mm	37 mm	5 mm
STABIL RB-A 26- 30 BL	97 mm	30 mm	30 mm	30 mm	11 mm	69 mm	40 mm	5 mm
STABIL RB-A 30- 34 BL	102 mm	30 mm	34 mm	34 mm	11 mm	74 mm	44 mm	5 mm
STABIL RB-A 35- 39 BL	108 mm	30 mm	39 mm	39 mm	11 mm	80 mm	49 mm	5 mm
STABIL RB-A 40- 44 BL	114 mm	30 mm	44 mm	44 mm	11 mm	86 mm	54 mm	5 mm
STABIL RB-A 45- 49 BL	119 mm	30 mm	49 mm	49 mm	11 mm	91 mm	59 mm	5 mm
STABIL RB-A 50- 54 BL	125 mm	30 mm	54 mm	54 mm	11 mm	97 mm	64 mm	5 mm
STABIL RB-A 55- 59 BL	130 mm	30 mm	59 mm	59 mm	11 mm	102 mm	69 mm	5 mm
STABIL RB-A 57- 61 BL	136 mm	40 mm	61 mm	61 mm	13 mm	103 mm	71 mm	5 mm
STABIL RB-A 62- 66 BL	141 mm	40 mm	66 mm	66 mm	13 mm	108 mm	76 mm	5 mm
STABIL RB-A 67- 71 BL	147 mm	40 mm	71 mm	71 mm	13 mm	114 mm	81 mm	5 mm
STABIL RB-A 72- 77 BL	152 mm	40 mm	77 mm	77 mm	13 mm	119 mm	87 mm	5 mm
STABIL RB-A 78- 83 BL	159 mm	40 mm	83 mm	83 mm	13 mm	126 mm	93 mm	5 mm
STABIL RB-A 84- 89 BL	165 mm	40 mm	89 mm	89 mm	13 mm	132 mm	99 mm	5 mm
STABIL RB-A 89- 95 BL	171 mm	50 mm	95 mm	95 mm	13 mm	138 mm	105 mm	5 mm
STABIL RB-A 96- 102 BL	178 mm	50 mm	102 mm	102 mm	13 mm	145 mm	112 mm	5 mm
STABIL RB-A 102- 109 BL	185 mm	50 mm	109 mm	109 mm	13 mm	152 mm	119 mm	5 mm
STABIL RB-A 109- 115 BL	192 mm	50 mm	115 mm	115 mm	13 mm	159 mm	125 mm	5 mm
STABIL RB-A 115- 122 BL	199 mm	50 mm	122 mm	122 mm	13 mm	166 mm	132 mm	5 mm
STABIL RB-A 122- 128 BL	205 mm	50 mm	128 mm	128 mm	13 mm	172 mm	138 mm	5 mm
STABIL RB-A 128- 134 BL	211 mm	50 mm	134 mm	134 mm	13 mm	178 mm	144 mm	5 mm
STABIL RB-A 134- 140 BL	217 mm	50 mm	140 mm	140 mm	13 mm	184 mm	150 mm	5 mm
STABIL RB-A 140- 146 BL	223 mm	50 mm	146 mm	146 mm	13 mm	190 mm	156 mm	5 mm
STABIL RB-A 146- 152 BL	230 mm	50 mm	152 mm	152 mm	13 mm	197 mm	162 mm	5 mm
STABIL RB-A 152- 158 BL	236 mm	50 mm	158 mm	158 mm	13 mm	203 mm	168 mm	5 mm
STABIL RB-A 157- 163 BL	241 mm	50 mm	163 mm	163 mm	13 mm	208 mm	173 mm	5 mm
STABIL RB-A 163- 169 BL	255 mm	50 mm	169 mm	169 mm	13 mm	222 mm	185 mm	8 mm
STABIL RB-A 168- 174 BL	260 mm	50 mm	174 mm	174 mm	13 mm	227 mm	190 mm	8 mm
STABIL RB-A 174- 180 BL	266 mm	50 mm	180 mm	180 mm	13 mm	233 mm	196 mm	8 mm
STABIL RB-A 181- 187 BL	273 mm	50 mm	187 mm	187 mm	13 mm	240 mm	203 mm	8 mm
STABIL RB-A 188- 194 BL	281 mm	50 mm	194 mm	194 mm	13 mm	248 mm	210 mm	8 mm
STABIL RB-A 194- 200 BL	287 mm	50 mm	200 mm	200 mm	13 mm	254 mm	216 mm	8 mm

Type	B1	b1	D	D1	d	e	H	t
STABIL RB-A 201- 207 BL	294 mm	50 mm	207 mm	207 mm	13 mm	261 mm	223 mm	8 mm
STABIL RB-A 208- 214 BL	301 mm	50 mm	214 mm	214 mm	13 mm	268 mm	230 mm	8 mm
STABIL RB-A 215- 221 BL	308 mm	50 mm	221 mm	221 mm	13 mm	275 mm	237 mm	8 mm
STABIL RB-A 222- 229 BL	316 mm	50 mm	229 mm	229 mm	13 mm	283 mm	245 mm	8 mm
STABIL RB-A 230- 237 BL	324 mm	50 mm	237 mm	237 mm	13 mm	291 mm	253 mm	8 mm
STABIL RB-A 238- 245 BL	332 mm	50 mm	245 mm	245 mm	13 mm	299 mm	261 mm	8 mm
STABIL RB-A 246- 254 BL	341 mm	50 mm	254 mm	254 mm	13 mm	308 mm	270 mm	8 mm
STABIL RB-A 255- 262 BL	350 mm	50 mm	262 mm	262 mm	13 mm	317 mm	278 mm	8 mm
STABIL RB-A 259- 266 BL	354 mm	50 mm	266 mm	266 mm	13 mm	321 mm	282 mm	8 mm
STABIL RB-A 266- 273 BL	361 mm	50 mm	273 mm	273 mm	13 mm	328 mm	289 mm	8 mm
STABIL RB-A 274- 282 BL	382 mm	60 mm	282 mm	282 mm	17 mm	342 mm	298 mm	8 mm
STABIL RB-A 283- 291 BL	391 mm	60 mm	291 mm	291 mm	17 mm	351 mm	307 mm	8 mm
STABIL RB-A 292- 300 BL	400 mm	60 mm	300 mm	300 mm	17 mm	360 mm	316 mm	8 mm
STABIL RB-A 301- 309 BL	409 mm	60 mm	309 mm	309 mm	17 mm	369 mm	325 mm	8 mm
STABIL RB-A 310- 317 BL	417 mm	60 mm	317 mm	317 mm	17 mm	377 mm	333 mm	8 mm
STABIL RB-A 317- 324 BL	425 mm	60 mm	324 mm	324 mm	17 mm	385 mm	340 mm	8 mm
STABIL RB-A 325- 333 BL	434 mm	60 mm	333 mm	333 mm	17 mm	394 mm	349 mm	8 mm
STABIL RB-A 334- 342 BL	443 mm	60 mm	342 mm	342 mm	17 mm	403 mm	358 mm	8 mm
STABIL RB-A 343- 350 BL	451 mm	60 mm	350 mm	350 mm	17 mm	411 mm	366 mm	8 mm
STABIL RB-A 349- 356 BL	457 mm	60 mm	356 mm	356 mm	17 mm	417 mm	372 mm	8 mm
STABIL RB-A 358- 365 BL	466 mm	60 mm	365 mm	365 mm	17 mm	426 mm	381 mm	8 mm
STABIL RB-A 366- 374 BL	475 mm	60 mm	374 mm	374 mm	17 mm	435 mm	390 mm	8 mm
STABIL RB-A 375- 382 BL	483 mm	60 mm	382 mm	382 mm	17 mm	443 mm	398 mm	8 mm
STABIL RB-A 381- 388 BL	489 mm	60 mm	388 mm	388 mm	17 mm	449 mm	404 mm	8 mm
STABIL RB-A 389- 396 BL	497 mm	60 mm	396 mm	396 mm	17 mm	457 mm	412 mm	8 mm
STABIL RB-A 397- 407 BL	508 mm	70 mm	407 mm	407 mm	17 mm	468 mm	423 mm	8 mm
STABIL RB-A 408- 418 BL	519 mm	70 mm	418 mm	418 mm	17 mm	479 mm	434 mm	8 mm
STABIL RB-A 419- 429 BL	530 mm	70 mm	429 mm	429 mm	17 mm	490 mm	445 mm	8 mm
STABIL RB-A 430- 440 BL	541 mm	70 mm	440 mm	440 mm	17 mm	501 mm	456 mm	8 mm
STABIL RB-A 441- 451 BL	552 mm	70 mm	451 mm	451 mm	17 mm	512 mm	467 mm	8 mm
STABIL RB-A 447- 457 BL	558 mm	70 mm	457 mm	457 mm	17 mm	518 mm	473 mm	8 mm
STABIL RB-A 458- 468 BL	569 mm	70 mm	468 mm	468 mm	17 mm	529 mm	484 mm	8 mm
STABIL RB-A 467- 477 BL	578 mm	70 mm	477 mm	477 mm	17 mm	538 mm	493 mm	8 mm
STABIL RB-A 477- 487 BL	588 mm	70 mm	487 mm	487 mm	17 mm	548 mm	503 mm	8 mm
STABIL RB-A 488- 498 BL	599 mm	70 mm	498 mm	498 mm	17 mm	559 mm	514 mm	8 mm

Type	B1	b1	D	D1	d	e	H	t
STABIL RB-A 498- 508 BL	609 mm	70 mm	508 mm	508 mm	17 mm	569 mm	524 mm	8 mm
STABIL RB-A 509- 519 BL	620 mm	70 mm	519 mm	519 mm	17 mm	580 mm	535 mm	8 mm
STABIL RB-A 520- 530 BL	631 mm	70 mm	530 mm	530 mm	17 mm	591 mm	546 mm	8 mm
STABIL RB-A 531- 541 BL	643 mm	70 mm	541 mm	541 mm	17 mm	603 mm	557 mm	8 mm
STABIL RB-A 542- 552 BL	654 mm	70 mm	552 mm	552 mm	17 mm	614 mm	568 mm	8 mm
STABIL RB-A 553- 563 BL	665 mm	70 mm	563 mm	563 mm	17 mm	625 mm	579 mm	8 mm
STABIL RB-A 564- 574 BL	676 mm	70 mm	574 mm	574 mm	17 mm	636 mm	590 mm	8 mm
STABIL RB-A 575- 585 BL	687 mm	70 mm	585 mm	585 mm	17 mm	647 mm	601 mm	8 mm
STABIL RB-A 586- 596 BL	698 mm	70 mm	596 mm	596 mm	17 mm	658 mm	612 mm	8 mm
STABIL RB-A 594- 604 BL	706 mm	70 mm	604 mm	604 mm	17 mm	666 mm	620 mm	8 mm
STABIL RB-A 600- 610 BL	712 mm	70 mm	610 mm	610 mm	17 mm	672 mm	626 mm	8 mm

Certification



Documents



RB-A Type Overview